


USR

Shuttering pipe, round





USR products are formwork pipes used in the installation of screed-covered underfloor duct systems. They are inserted into the UBDHB false floor sockets or UKDA assembly covers as lost formwork, where they form a fixed unit with the floor sockets. The pipes are removed again after the screed has hardened using an integrated ripcord. They are made of plastic-coated cardboard and have VDE/TÜV approval. They are available in heights of 150 and 225 mm and diameters of 260 and 308 mm.

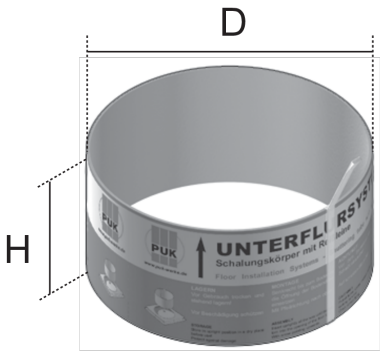

Artikel	Typ	H	D	W
USR 259-150	shuttering tube, D=260mm, H=150mm,	150 mm	260 mm	0.434 kg
USR 308-150	shuttering tube, D=308mm, H=150mm,	150 mm	308 mm	0.470 kg
USR 308-225	shuttering tube, D=308mm, H=225mm,	225 mm	308 mm	0.670 kg

DETAIL- UND ANWENDUNGSBILDER



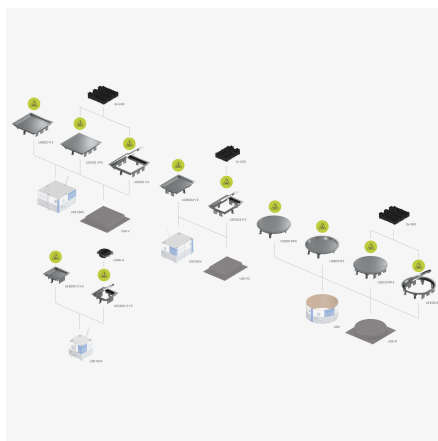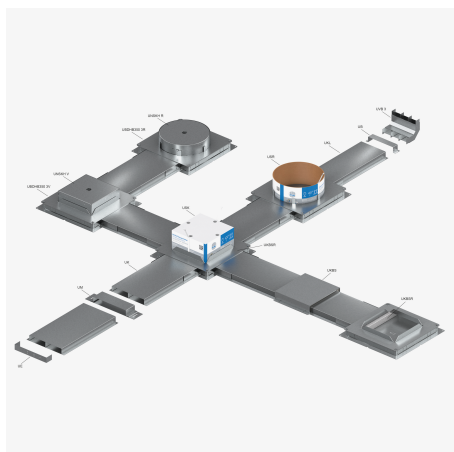

DIN

Load requirements according to: DIN EN 50085

