


VAS-AS

Shear connector rod, stone

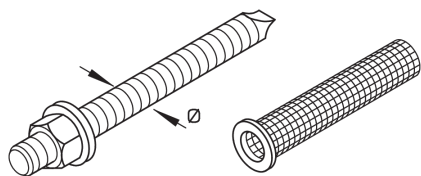


The approved shear connector rod VAS-AS in combination with the shear connector mortar VAB-HB M is approved or suitable for various building materials. The manufacturer's specifications must be observed. Load specifications apply depending on the substrate. The shear connector rod is available in diameters 8, 10 and 12 mm. The minimum drilling depth must be 80 mm. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	Ø	L _{min}	W
VAS-AS 10/25	Shear connector rod, stone VAS-AS 10/25	10 mm	80 mm	0.066 kg
VAS-AS 12/40	Shear connector rod, stone VAS-AS 12/40	12 mm	80 mm	0.118 kg
VAS-AS 8/15	Shear connector rod, stone VAS-AS 8/15	8 mm	80 mm	0.039 kg

Artikel	Typ	Ø	L _{min}	W
VAS-AS 10/25E4	Shear connector rod, stone VAS-AS	10 mm	80 mm	0.071 kg
VAS-AS 12/40E4	Shear connector rod, stone VAS-AS	12 mm	80 mm	0.118 kg
VAS-AS 8/15E4	Shear connector rod, stone VAS-AS 8/15E4	8 mm	80 mm	0.041 kg

DETAIL- UND ANWENDUNGSBILDER



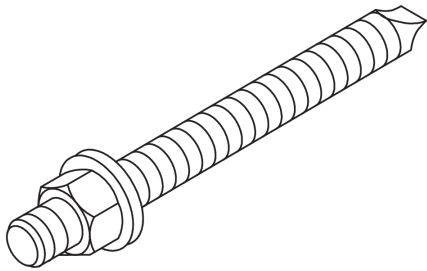

OPTIONALES ZUBEHÖR

VAS-BS, VAS-M, VAS-SH

