


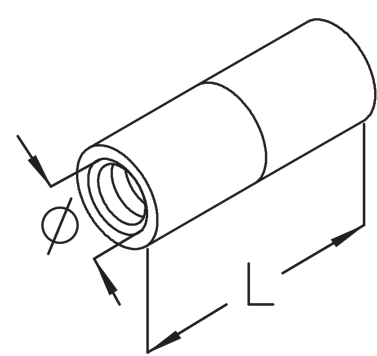

VM
Rod coupling

Connector sleeve VM can be used to mount threaded rods or central suspensions etc. on ceiling dowels. They are available in threads M8, M10 and M12. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	L	Ø	W
VM M10	Rod coupling VM M10	30 mm	10 mm	0.014 kg
VM M12	Rod coupling VM M12	30 mm	12 mm	0.017 kg
VM M8	Rod coupling VM M8	30 mm	8 mm	0.011 kg

Artikel	Typ	L	Ø	W
VM M10E	Rod coupling VM M10E	30 mm	10 mm	0.015 kg
VM M12E	Rod coupling VM M12E	30 mm	12 mm	0.024 kg
VM M8E	Rod coupling VM M8E	30 mm	8 mm	0.012 kg

DETAIL- UND ANWENDUNGSBILDER



