


## WLBD

### Wide-span bend cover

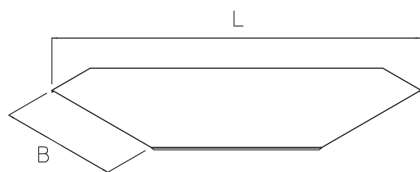


The wide-span bend cover WLBD is suitable for WLB 200 and WLRB 200 wide-span bends and protects them from dirt, moisture and UV radiation. It is placed on top of the bend and secured with WLD-SW securing brackets. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

| Artikel  | Typ                    | B      | L       | t       | direction  | W   | W         |
|----------|------------------------|--------|---------|---------|------------|-----|-----------|
| WLBD 20S | Cover of bend WLBD 20S | 240 mm | 906 mm  | 0.75 mm | horizontal | 90° | 2.487 kg  |
| WLBD 30S | Cover of bend WLBD 30S | 340 mm | 1048 mm | 1.00 mm | horizontal | 90° | 4.416 kg  |
| WLBD 40S | Cover of bend WLBD 40S | 440 mm | 1189 mm | 1.00 mm | horizontal | 90° | 5.672 kg  |
| WLBD 50S | Cover of bend WLBD 50S | 540 mm | 1330 mm | 1.25 mm | horizontal | 90° | 8.856 kg  |
| WLBD 60S | Cover of bend WLBD 60S | 640 mm | 1471 mm | 1.25 mm | horizontal | 90° | 10.818 kg |

| Artikel  | Typ                    | B      | L       | t       | direction  | W   | W        |
|----------|------------------------|--------|---------|---------|------------|-----|----------|
| WLBD 20F | Cover of bend WLBD 20F | 240 mm | 906 mm  | 0.75 mm | horizontal | 90° | 2.900 kg |
| WLBD 30F | Cover of bend WLBD 30F | 340 mm | 1048 mm | 1.00 mm | horizontal | 90° | 4.000 kg |
| WLBD 40F | Cover of bend WLBD 40F | 440 mm | 1189 mm | 1.00 mm | horizontal | 90° | 5.400 kg |
| WLBD 50F | Cover of bend WLBD 50F | 540 mm | 1330 mm | 1.25 mm | horizontal | 90° | 6.900 kg |
| WLBD 60F | Cover of bend WLBD 60F | 640 mm | 1471 mm | 1.25 mm | horizontal | 90° | 8.900 kg |

## DETAIL- UND ANWENDUNGSBILDER



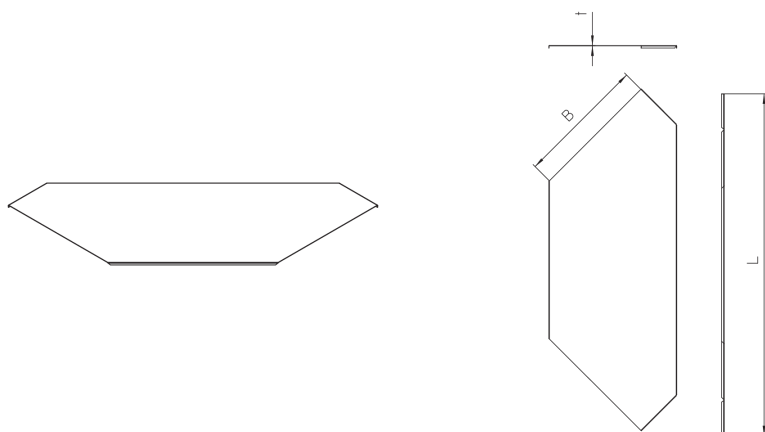

## OPTIONALES ZUBEHÖR

WLD-SW

