


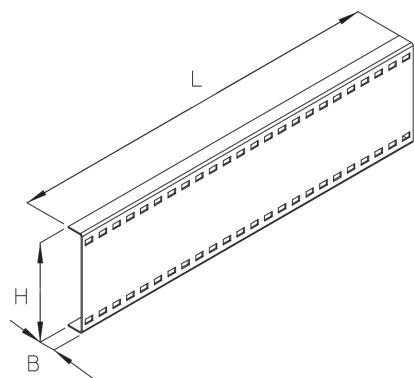

WL 200

Wide-span cable ladder connector, height=200 mm

WL 200 wide span connectors can be used to connect 200 mm wide-span cable trays together. One side of the connector is mounted as a floating bearing to allow for thermal expansion. The required screw fasteners (SEMSS/SEMB + US) must be ordered separately. The other side of the connector is formed as a fixed bearing. A minimum distance of 4 mm must be maintained between the cable trays. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	H	B	L	t	W
WL 200S	Coupler WL 200S	208 mm	34 mm	800 mm	2.50 mm	4.131 kg

Artikel	Typ	H	B	L	t	W
WL 200F	Coupler WL 200F	208 mm	34 mm	800 mm	2.50 mm	4.345 kg

DETAIL- UND ANWENDUNGSBILDER

