


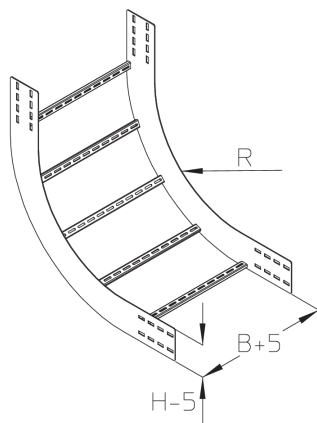

WPLS 150

Wide-span cable ladder riser, height=150 mm


The wide-span floor duct riser WPLS 150 with integrated connectors allows the direction of cable routing to be changed vertically by 90° upwards. It is suitable for wide-span cable ladders with rails 150 mm high and is 200 to 600 mm wide. The riser is pushed into the wide-span cable ladder and then bolted in place. The connecting rack is then mounted on the riser. It has a radius of 450 mm. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

Artikel	Typ	H	H _H	B	R	direction	W	W
WPLS 150-20F	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	200 mm	450 mm	vertically rising	90°	10.900 kg
WPLS 150-30F	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	300 mm	450 mm	vertically rising	90°	11.270 kg
WPLS 150-40F	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	400 mm	450 mm	vertically rising	90°	11.640 kg
WPLS 150-50F	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	500 mm	450 mm	vertically rising	90°	12.000 kg
WPLS 150-60F	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	600 mm	450 mm	vertically rising	90°	12.370 kg

Artikel	Typ	H	H _H	B	R	direction	W	W
WPLS 150-20E	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	200 mm	450 mm	vertically rising	90°	10.290 kg
WPLS 150-30E	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	300 mm	450 mm	vertically rising	90°	11.550 kg
WPLS 150-40E	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	400 mm	450 mm	vertically rising	90°	10.980 kg
WPLS 150-50E	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	500 mm	450 mm	vertically rising	90°	11.320 kg
WPLS 150-60E	Wide-span cable ladder inside riser WPLS	150 mm	150 mm	600 mm	450 mm	vertically rising	90°	11.670 kg



DETAIL- UND ANWENDUNGSBILDER



OPTIONALES ZUBEHÖR

WPSD

