


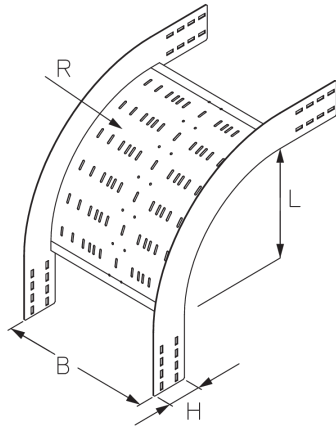

WPRF 150

Wide-span cable tray riser, height = 150 mm




The wide-span cable tray riser WPRF 150 with integrated connectors allows the direction of cable routing to be changed vertically by 90° downwards. It is suitable for wide-span cable trays with rails 150 mm high and is 200 to 600 mm wide. The riser is pushed into the wide-span cable tray and then bolted in place. The connecting cable tray is then mounted on the riser. It has a radius of 470 mm.

Artikel	Typ	H	H _H	B	L	R	direction	W	W
WPRF 150-40F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	400 mm	510 mm	470 mm	vertically falling	90°	12.820 kg
WPRF 150-50F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	500 mm	510 mm	470 mm	vertically falling	90°	13.490 kg
WPRF 150-60F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	600 mm	510 mm	470 mm	vertically falling	90°	14.150 kg
WPRF 150-20F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	200 mm	510 mm	470 mm	vertically falling	90°	11.520 kg
WPRF 150-30F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	300 mm	510 mm	470 mm	vertically falling	90°	12.160 kg

Artikel	Typ	H	H _H	B	L	R	direction	W	W
WPRF 150-40E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	400 mm	510 mm	470 mm	vertically falling	90°	12.048 kg
WPRF 150-50E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	500 mm	510 mm	470 mm	vertically falling	90°	12.688 kg
WPRF 150-60E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	600 mm	510 mm	470 mm	vertically falling	90°	13.308 kg
WPRF 150-20E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	200 mm	510 mm	470 mm	vertically falling	90°	10.838 kg
WPRF 150-30E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	300 mm	510 mm	470 mm	vertically falling	90°	11.438 kg



DETAIL- UND ANWENDUNGSBILDER

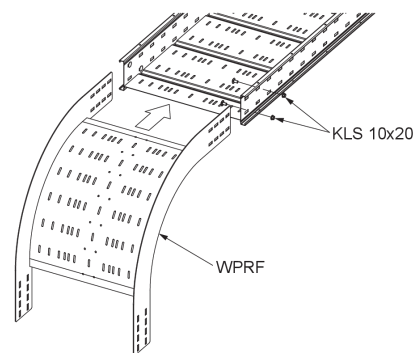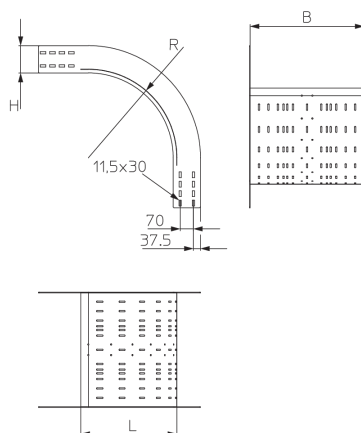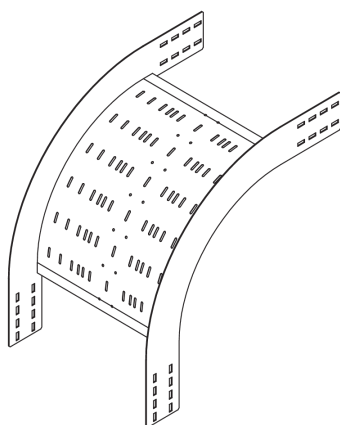

OPTIONALES ZUBEHÖR

WPFD

