


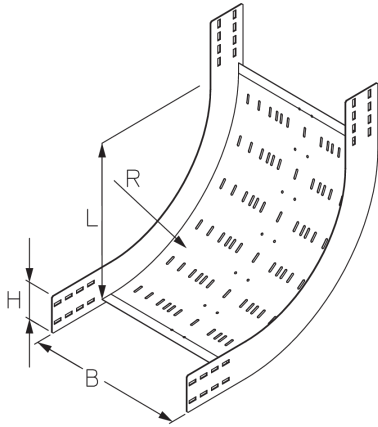

WPRS 150

Wide-span cable tray riser, height = 150 mm


The wide-span cable tray riser WPRS 150 with integrated connectors allows the direction of cable routing to be changed vertically by 90° upwards. It is suitable for wide-span cable trays with rails 150 mm high and is 200 to 600 mm wide. The riser is pushed into the wide-span cable tray and then bolted in place. The connecting cable tray is then mounted on the riser. It has a radius of 576 mm.

Artikel	Typ	H	H _H	B	L	R	direction	W	W
WPRS 150-20F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	200 mm	616 mm	576 mm	vertically rising	90°	11.800 kg
WPRS 150-30F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	300 mm	616 mm	576 mm	vertically rising	90°	12.580 kg
WPRS 150-40F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	400 mm	616 mm	576 mm	vertically rising	90°	13.390 kg
WPRS 150-50F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	500 mm	616 mm	576 mm	vertically rising	90°	14.190 kg
WPRS 150-60F	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	600 mm	616 mm	576 mm	vertically rising	90°	15.000 kg

Artikel	Typ	H	H _H	B	L	R	direction	W	W
WPRS 150-20E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	200 mm	616 mm	576 mm	vertically rising	90°	11.108 kg
WPRS 150-30E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	300 mm	616 mm	576 mm	vertically rising	90°	11.838 kg
WPRS 150-40E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	400 mm	616 mm	576 mm	vertically rising	90°	12.598 kg
WPRS 150-50E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	500 mm	616 mm	576 mm	vertically rising	90°	13.348 kg
WPRS 150-60E	wide-span cable tray bend WPRB 150-20F	150 mm	150 mm	600 mm	616 mm	576 mm	vertically rising	90°	14.108 kg



DETAIL- UND ANWENDUNGSBILDER

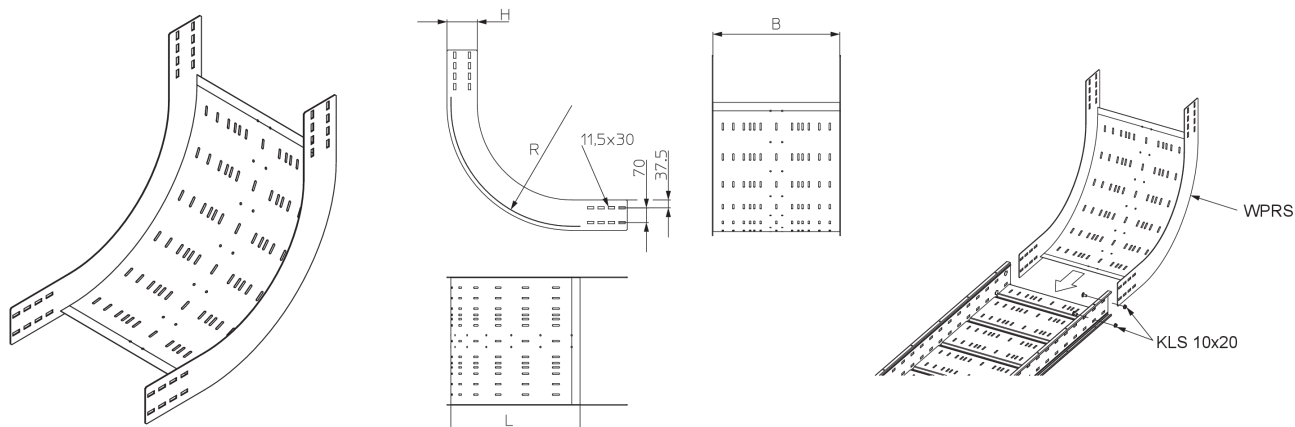

OPTIONALES ZUBEHÖR

WPSD

