


A 4

48x26 mm profile rail, unperforated

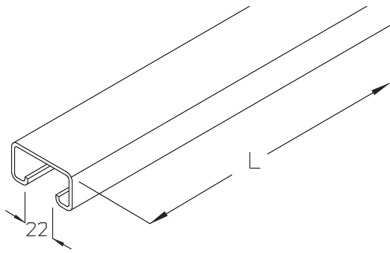

The profile rail A 4 is unperforated and consists of a C+ profile 48 x 26 mm with a slot width of 22 mm (material thickness = 2.5 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 3000 or 6000 mm.

steel, bright rolled

Products	L	profile height	profile width	t	weight
A 4-30B	3000 mm	26 mm	48 mm	2,50 mm	6,850 kg
A 4-60B	6000 mm	26 mm	48 mm	2,50 mm	13,500 kg

steel, batch/hot-dip galvanized

Products	L	profile height	profile width	t	weight
A 4-30F	3000 mm	26 mm	48 mm	2,50 mm	6,400 kg
A 4-60F	6000 mm	26 mm	48 mm	2,50 mm	12,800 kg




L: length

t: material thickness

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

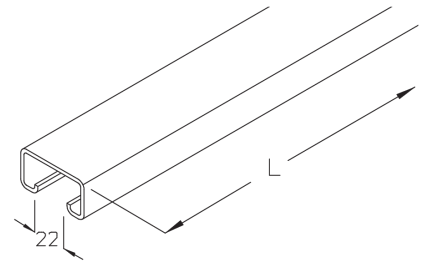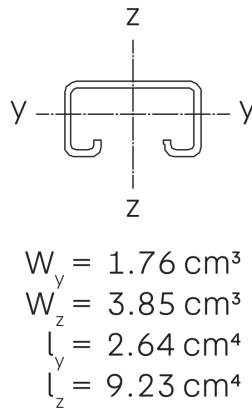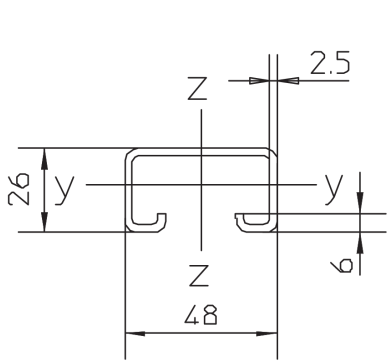

OPTIONAL ACCESSORIES

HS22, ASK 4

