


## A 8

### 40x22 mm profile rail, unperforated

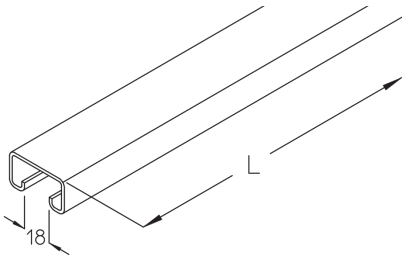

The profile rail A 8 is unperforated and consists of a C+ profile 40 x 22 mm with a slot width of 18 mm (material thickness = 2 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 3000 or 6000 mm.

### steel, bright rolled

Products	L	profile height	profile width	t	weight
A 8-30B	3000 mm	22 mm	40 mm	2,00 mm	4,490 kg
A 8-60B	6000 mm	22 mm	40 mm	2,00 mm	9,162 kg

### steel, batch/hot-dip galvanized

Products	L	profile height	profile width	t	weight
A 8-30F	3000 mm	22 mm	40 mm	2,00 mm	4,800 kg
A 8-60F	6000 mm	22 mm	40 mm	2,00 mm	10,074 kg

L: length




t: material thickness

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

---

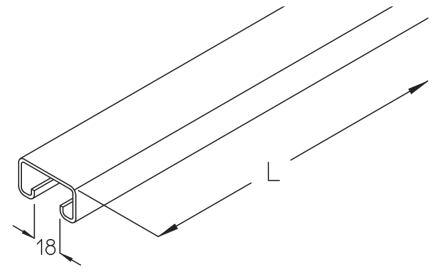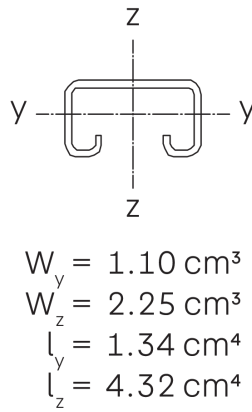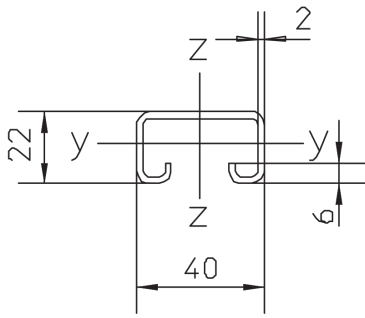

## OPTIONAL ACCESSORIES

SA 1, SAI 21, HS18, AM 18, AMF 18, AMA 18, ASK 8

