

ACF-E

Cable clamp for fastening to C profile rails

The ACF-E cable clamp with full-surface pressure trough made of galvanised steel can guide cables with a maximum diameter of 56 mm. It is suitable for attachment to C profile rails with a slot width > 10 mm. On request, a GW counter trough can be fitted for improved cable support. The ACF-E cable clamp is made of stainless steel (1.4301).

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	D	H _{max}	cables	M	weight
12 ACF-E	8 - 12 mm	41 mm	1	2 Nm	0,022 kg
16 ACF-E	12 - 16 mm	46 mm	1	2 Nm	0,025 kg
20 ACF-E	16 - 20 mm	50 mm	1	2 Nm	0,028 kg
24 ACF-E	20 - 24 mm	54 mm	1	2 Nm	0,032 kg
28 ACF-E	24 - 28 mm	58 mm	1	2 Nm	0,036 kg
32 ACF-E	28 - 32 mm	63 mm	1	2 Nm	0,050 kg
36 ACF-E	32 - 36 mm	67 mm	1	2 Nm	0,053 kg
40 ACF-E	36 - 40 mm	71 mm	1	2 Nm	0,059 kg
44 ACF-E	40 - 44 mm	81 mm	1	4 Nm	0,077 kg
48 ACF-E	44 - 48 mm	85 mm	1	4 Nm	0,084 kg
52 ACF-E	48 - 52 mm	90 mm	1	4 Nm	0,091 kg
56 ACF-E	52 - 56 mm	94 mm	1	4 Nm	0,093 kg
12/2 ACF-E	8 - 12 mm	58 mm	2	2 Nm	0,029 kg
16/2 ACF-E	12 - 16 mm	67 mm	2	2 Nm	0,034 kg
20/2 ACF-E	16 - 20 mm	75 mm	2	2 Nm	0,039 kg
24/2 ACF-E	20 - 24 mm	84 mm	2	2 Nm	0,045 kg
28/2 ACF-E	24 - 28 mm	92 mm	2	2 Nm	0,051 kg
32/2 ACF-E	28 - 32 mm	101 mm	2	2 Nm	0,072 kg
36/2 ACF-E	32 - 36 mm	109 mm	2	2 Nm	0,078 kg
40/2 ACF-E	36 - 40 mm	117 mm	2	2 Nm	0,087 kg
44/2 ACF-E	40 - 44 mm	127 mm	2	4 Nm	0,113 kg

Page 1



PRODUCT INFORMATION

Products	D	H _{max}	cables	M	weight
48/2 ACF-E	44 - 48 mm	135 mm	2	4 Nm	0,142 kg
52/2 ACF-E	48 - 52 mm	144 mm	2	4 Nm	0,126 kg
56/2 ACF-E	52 - 56 mm	152 mm	2	4 Nm	0,134 kg


D: clamping range

H_{max}: maximum height

cables: max. number of cables

M: torque

DETAIL AND APPLICATION IMAGES

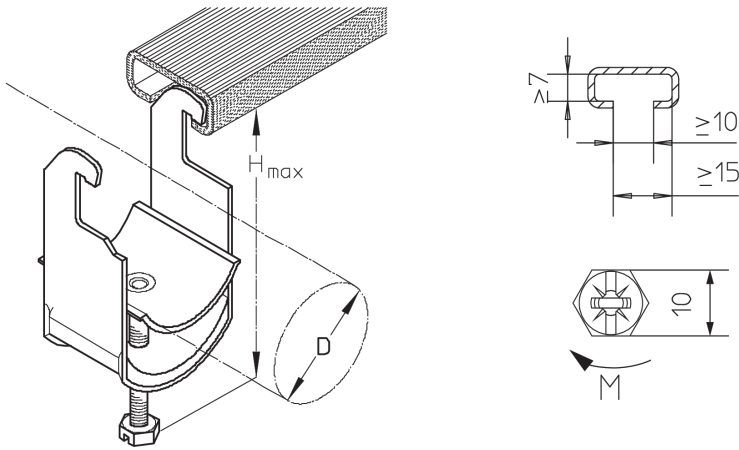

OPTIONAL ACCESSORIES

GW 12-70, DW, A 2, A 4, A 7, A 8, A 9, A 41, KHA 21, KHA 41, B 3, B 6

