


B 6

28x15 mm profile rail, unperforated

The profile rail B 6 is unperforated and consists of a C profile 28 x 15 mm with a slot width of 12 mm (material thickness = 2.3 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 3000 or 6000 mm.

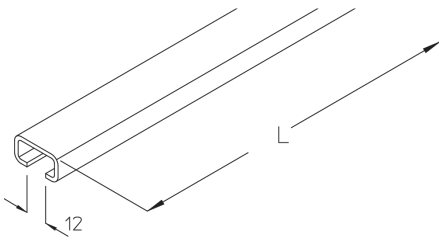

steel, bright rolled

Products	L	profile height	profile width	t	weight
B 6-30B	3000 mm	15 mm	28 mm	2,30 mm	3,150 kg
B 6-60B	6000 mm	15 mm	28 mm	2,30 mm	6,672 kg

steel, batch/hot-dip galvanized

Products	L	profile height	profile width	t	weight
B 6-30F	3000 mm	15 mm	28 mm	2,30 mm	3,430 kg
B 6-60F	6000 mm	15 mm	28 mm	2,30 mm	6,860 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	L	profile height	profile width	t	weight
B 6-30E	3000 mm	15 mm	28 mm	2,30 mm	3,150 kg
B 6-60E	6000 mm	15 mm	28 mm	2,30 mm	6,714 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11




PRODUCT INFORMATION

Products	L	profile height	profile width	t	weight
B 6-30E4	3000 mm	15 mm	28 mm	2,30 mm	3,150 kg
B 6-60E4	6000 mm	15 mm	28 mm	2,30 mm	6,804 kg

L: length
t: material thickness

DETAIL AND APPLICATION IMAGES

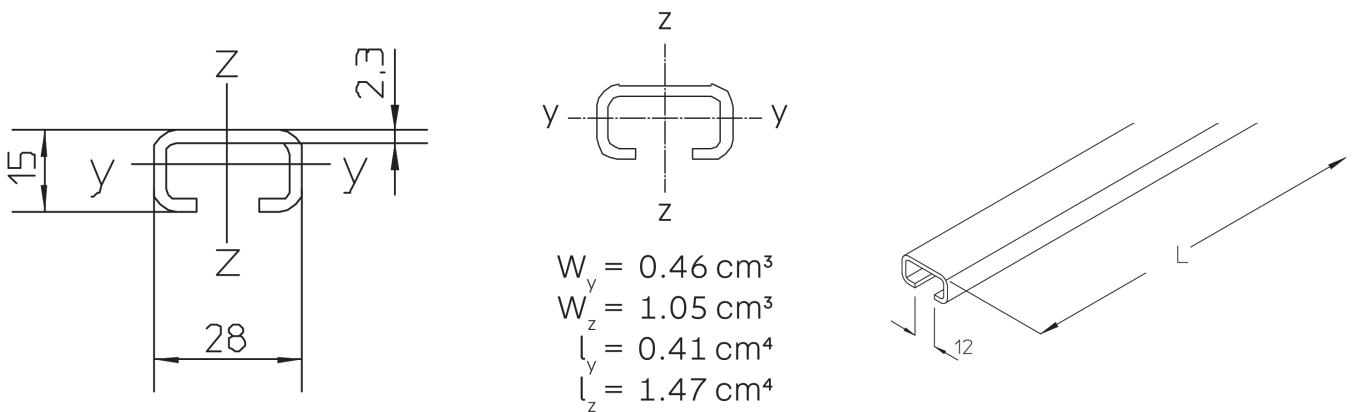

OPTIONAL ACCESSORIES

HS12, AM 12

