

B 7

30x15 mm profile rail, unperforated

The profile rail B 7 is unperforated and consists of a C profile 30 x 15 mm with a slot width of 16 mm (material thickness = 1.5 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 3000 or 6000 mm.

steel, bright rolled

Products	L	H _p	B _p	t	weight
B 7-30B	3000 mm	15 mm	30 mm	1,50 mm	2,220 kg
B 7-60B	6000 mm	15 mm	30 mm	1,50 mm	4,440 kg

steel, continuously hot galvanized/Senzimir process

Products	L	H _p	B _p	t	weight
B 7-30S	3000 mm	15 mm	30 mm	1,50 mm	2,220 kg
B 7-60S	6000 mm	15 mm	30 mm	1,50 mm	4,440 kg

steel, batch/hot-dip galvanized

Products	L	H _p	B _p	t	weight
B 7-30F	3000 mm	15 mm	30 mm	1,50 mm	2,500 kg
B 7-60F	6000 mm	15 mm	30 mm	1,50 mm	4,750 kg

Stainless steel, according to ASTM 304 / BS 304 S 3




PRODUCT INFORMATION

Products	L	H _p	B _p	t	weight
B 7-30E	3000 mm	15 mm	30 mm	1,50 mm	2,220 kg
B 7-60E	6000 mm	15 mm	30 mm	1,50 mm	4,440 kg

L: length
H_p: profile height
B_p: profile width
t: material thickness

DETAIL AND APPLICATION IMAGES

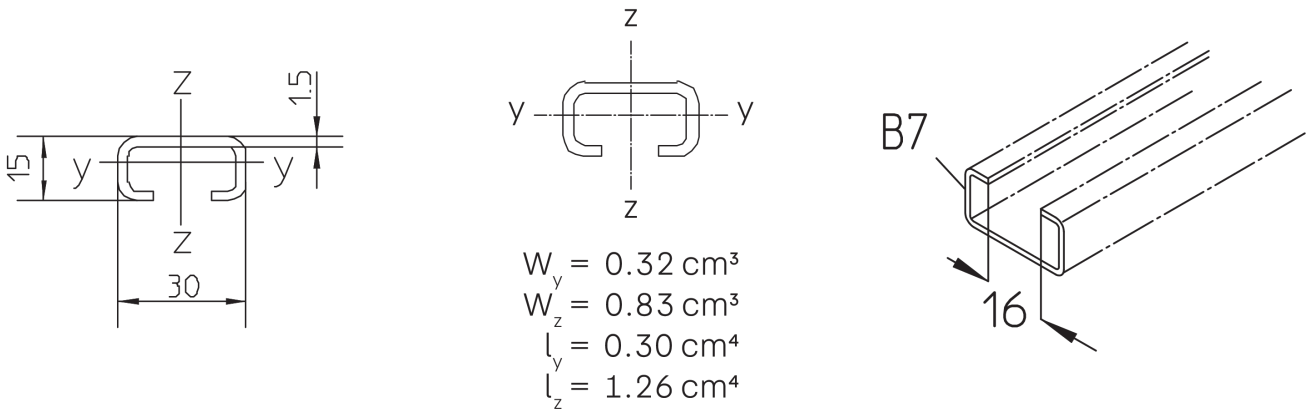

OPTIONAL ACCESSORIES

HS16, AM 16

