


BKBG 100

Floor duct with mitre cut, height = 100 mm

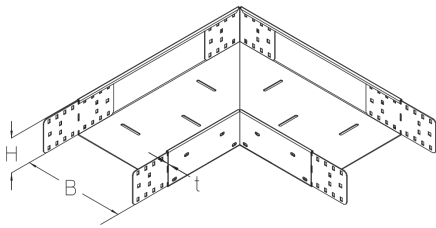

The floor duct bend BKBG 100 with integrated connectors and mitre cut allows the direction of cable routing to be changed horizontally by 90°. It is 100 mm high and 100 to 600 mm wide. It is made of sendzimir hot-dip galvanized steel. To dissipate vertical live loads, one separating strip must be installed in the floor duct for widths ≥ 300 mm and two separating strips for widths ≥ 500 mm. The bend is pushed into the floor ducts and then bolted in place.

steel, continuously hot galvanized/Sendzimir process

Products	H	B	t			W
BKBG 100-10S	100 mm	100 mm	2,00 mm	90 °	HORIZONTAL	4,874 kg
incl.:						
4 x BKV 100S, 2 x BKV90 100S, 1 x BKGR 100-10S, 1 x BKGL 100-10S, 12 x KLR						
BKBG 100-15S	100 mm	150 mm	2,00 mm	90 °	HORIZONTAL	5,594 kg
incl.:						
1 x BKGR 100-15S, 1 x BKGL 100-15S, 12 x KLR, 4 x BKV 100S, 2 x BKV90 100S						
BKBG 100-20S	100 mm	200 mm	2,00 mm	90 °	HORIZONTAL	6,414 kg
incl.:						
1 x BKGR 100-20S, 1 x BKGL 100-20S, 12 x KLR, 4 x BKV 100S, 2 x BKV90 100S						
BKBG 100-30S	100 mm	300 mm	2,00 mm	90 °	HORIZONTAL	8,074 kg
incl.:						
2 x BKV90 100S, 1 x BKGR 100-30S, 1 x BKGL 100-30S, 12 x KLR, 4 x BKV 100S						
BKBG 100-40S	100 mm	400 mm	2,00 mm	90 °	HORIZONTAL	10,434 kg
incl.:						
1 x BKGR 100-40S, 1 x BKGL 100-40S, 12 x KLR, 4 x BKV 100S, 2 x BKV90 100S						
BKBG 100-50S	100 mm	500 mm	2,00 mm	90 °	HORIZONTAL	12,974 kg
incl.:						
1 x BKGR 100-50S, 1 x BKGL 100-50S, 12 x KLR, 4 x BKV 100S, 2 x BKV90 100S						
BKBG 100-60S	100 mm	600 mm	2,00 mm	90 °	HORIZONTAL	15,674 kg
incl.:						
1 x BKGR 100-60S, 1 x BKGL 100-60S, 12 x KLR, 4 x BKV 100S, 2 x BKV90 100S						





Page 1



PRODUCT INFORMATION

H: height
B: width
t: material thickness
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

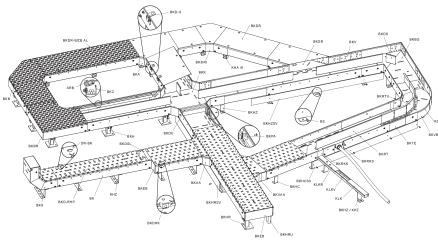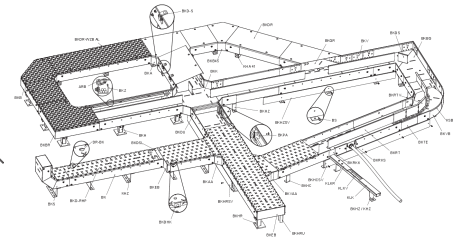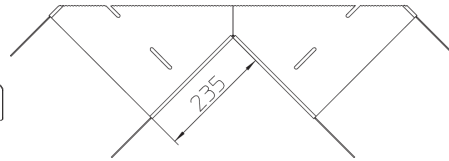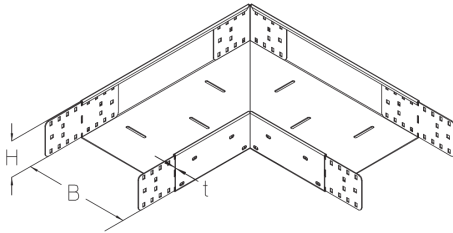

OPTIONAL ACCESSORIES

BKBGDR, BKBGDR-RHP, BKBGDR-WZB AL, BKRTV 100, BKDS 100

