


## BKGL 100

Floor duct with mitre cut, left, height = 100 mm

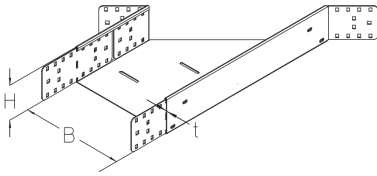

The floor duct branch BKGL 100 with a mitre cut on the left and integrated connectors allows the direction of cable routing to be changed horizontally in the form of a 45° branch. It is 100 mm high and 100 to 600 mm wide. It is made of sendzimir hot-dip galvanised steel. To dissipate vertical live loads, one separating strip must be installed in the floor duct for widths  $\geq 300$  mm and two separating strips for widths  $\geq 500$  mm. The side rail of the main floor duct is cut out accordingly at the point where the connecting floor duct will branch off. The BKGL branch is positioned and bolted in place at this point. The branching floor duct can then be pushed in.

steel, continuously hot galvanized/Sendzimir process

Products	H	B	t		W
BKGL 100-10S	100 mm	100 mm	2,00 mm	45 °	2,782 kg
incl.:					
8 × KLR, 2 × BKV 100S, 1 × BKV45 100S, 1 × BKV135 100S					
BKGL 100-15S	100 mm	150 mm	2,00 mm	45 °	3,142 kg
incl.:					
8 × KLR, 2 × BKV 100S, 1 × BKV45 100S, 1 × BKV135 100S					
BKGL 100-20S	100 mm	200 mm	2,00 mm	45 °	3,552 kg
incl.:					
8 × KLR, 2 × BKV 100S, 1 × BKV45 100S, 1 × BKV135 100S					
BKGL 100-30S	100 mm	300 mm	2,00 mm	45 °	4,382 kg
incl.:					
1 × BKV135 100S, 8 × KLR, 2 × BKV 100S, 1 × BKV45 100S					
BKGL 100-40S	100 mm	400 mm	2,00 mm	45 °	5,562 kg
incl.:					
8 × KLR, 2 × BKV 100S, 1 × BKV45 100S, 1 × BKV135 100S					
BKGL 100-50S	100 mm	500 mm	2,00 mm	45 °	6,832 kg
incl.:					
8 × KLR, 2 × BKV 100S, 1 × BKV45 100S, 1 × BKV135 100S					
BKGL 100-60S	100 mm	600 mm	2,00 mm	45 °	8,182 kg
incl.:					
8 × KLR, 2 × BKV 100S, 1 × BKV45 100S, 1 × BKV135 100S					

Page 1




# PRODUCT INFORMATION

---

**H:** height  
**B:** width  
**t:** material thickness  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES

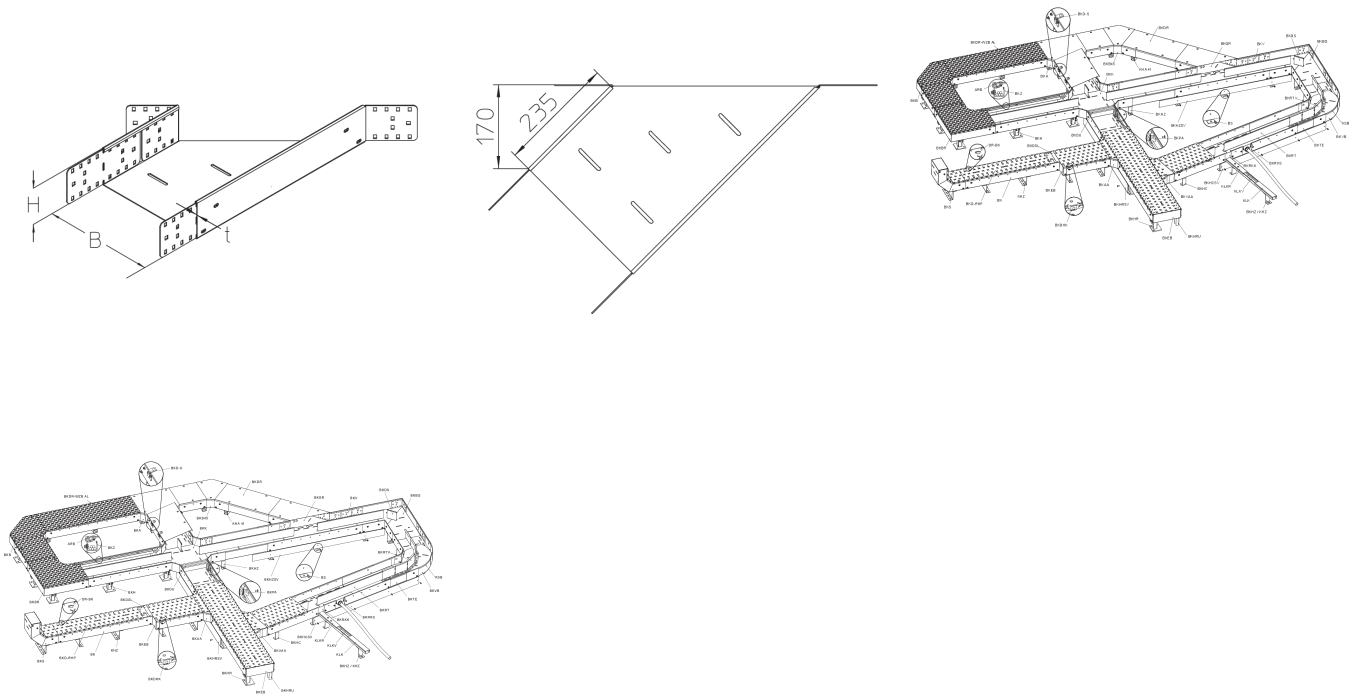

## OPTIONAL ACCESSORIES

BKGLDR, BKGLDR-RHP, BKGLDR-WZB AL, BKRTV 100, BKDS 100

