


BKGL 110

Floor duct with mitre cut, left, height = 110 mm

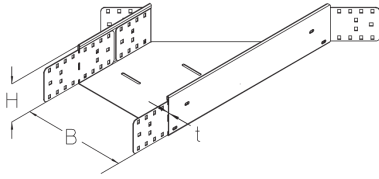

The floor duct branch BKGL 110 with a mitre cut on the left and integrated connectors allows the direction of cable routing to be changed horizontally in the form of a 45° branch. It is 110 mm high and 100 to 600 mm wide. It is made of sendzimir hot-dip galvanised steel. To dissipate vertical live loads, one separating strip must be installed in the floor duct for widths ≥ 300 mm and two separating strips for widths ≥ 500 mm. The side rail of the main floor duct is cut out accordingly at the point where the connecting floor duct will branch off. The BKGL branch is positioned and bolted in place at this point. The branching floor duct can then be pushed in.

steel, continously hot galvanized/Sendzimir process

Products	H	B	t		weight
BKGL 110-10S	110 mm	100 mm	2,00 mm	45 °	2,872 kg
incl.:					
8 × KLR, 2 × BKV 110S, 1 × BKV45 110S, 1 × BKV135 110S					
BKGL 110-15S	110 mm	150 mm	2,00 mm	45 °	3,242 kg
incl.:					
8 × KLR, 2 × BKV 110S, 1 × BKV45 110S, 1 × BKV135 110S					
BKGL 110-20S	110 mm	200 mm	2,00 mm	45 °	3,652 kg
incl.:					
8 × KLR, 2 × BKV 110S, 1 × BKV45 110S, 1 × BKV135 110S					
BKGL 110-30S	110 mm	300 mm	2,00 mm	45 °	4,592 kg
incl.:					
1 × BKV135 110S, 8 × KLR, 2 × BKV 110S, 1 × BKV45 110S					
BKGL 110-40S	110 mm	400 mm	2,00 mm	45 °	5,702 kg
incl.:					
8 × KLR, 2 × BKV 110S, 1 × BKV45 110S, 1 × BKV135 110S					
BKGL 110-50S	110 mm	500 mm	2,00 mm	45 °	6,982 kg
incl.:					
8 × KLR, 2 × BKV 110S, 1 × BKV45 110S, 1 × BKV135 110S					
BKGL 110-60S	110 mm	600 mm	2,00 mm	45 °	8,352 kg
incl.:					
8 × KLR, 2 × BKV 110S, 1 × BKV45 110S, 1 × BKV135 110S					


Page 1



PRODUCT INFORMATION

H: height
B: width
t: material thickness

DETAIL AND APPLICATION IMAGES

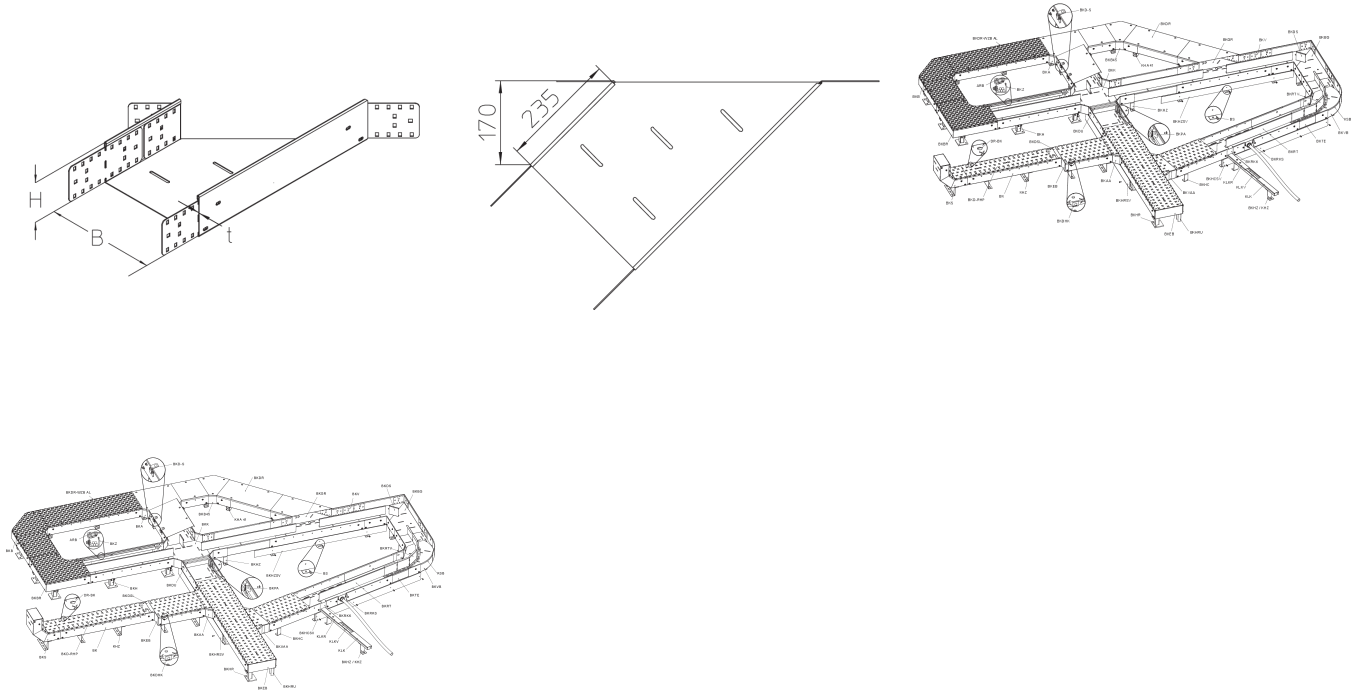

OPTIONAL ACCESSORIES

BKGLDR, BKGLDR-RHP, BKGLDR-WZB AL, BKRTV 110, BKDS 110

