

## BKHZSV

### Floor Duct Side Panelling

The BKHZSV floor duct side panelling is used when the floor trunking is elevated using BKHZ floor trunking brackets and fastened using BS 5.5x19 self-drilling screws. The side panelling protects elevated floor trunking from kicks and dirt and closes off the floor trunking system underneath. They have a height of 69 or 79 mm, a length of 1000, 1500 or 3000 mm and are made of Sendzimir hot-dip galvanised steel.


steel, continuously hot galvanized/Sendzimir process

Products	H	L	t	weight
BKHZSV 1-75S	69 mm	1000 mm	1,00 mm	0,542 kg
BKHZSV 1-85S	79 mm	1000 mm	1,00 mm	0,620 kg
BKHZSV 1.5-75S	69 mm	1500 mm	1,00 mm	0,812 kg
BKHZSV 1.5-85S	79 mm	1500 mm	1,00 mm	0,930 kg
BKHZSV 75S	69 mm	3000 mm	1,00 mm	1,625 kg
BKHZSV 85S	79 mm	3000 mm	1,00 mm	1,860 kg

**H:** height  
**L:** length  
**t:** material thickness

## DETAIL AND APPLICATION IMAGES



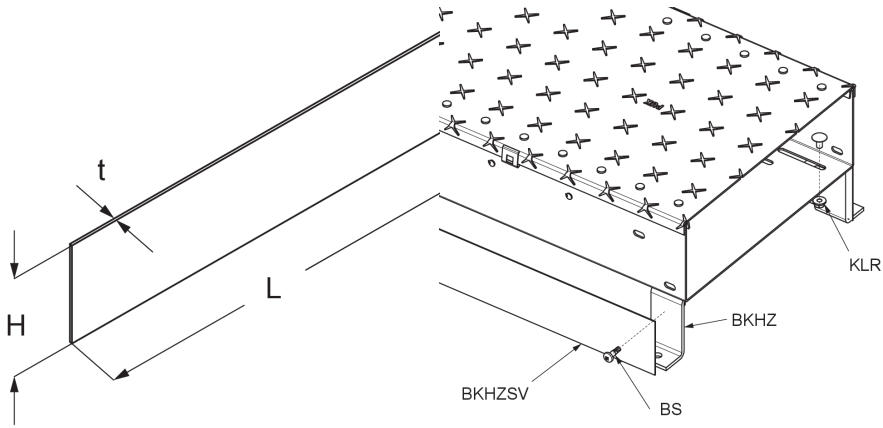

## OPTIONAL ACCESSORIES

BS

