


BL 5

Corner angle

The corner angle BL 5 is used to fasten bracket holders KHA / KHAL and KHU 40/57/60 to walls. The bracket is bolted to the bracket holder and dowelled to the concrete wall. It is made of hot-dip galvanised steel.

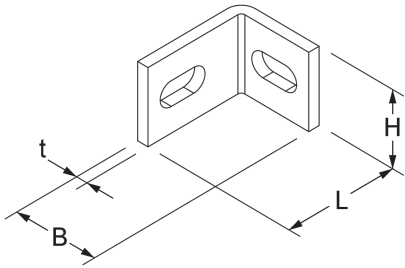

steel, batch/hot-dip galvanized

Products	H	B	L	t	W
BL 5F	40 mm	45 mm	60 mm	6,00 mm	0,162 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	L	t	W
BL 5E	40 mm	45 mm	60 mm	6,00 mm	0,152 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11


Products	H	B	L	t	W
BL 5E4	40 mm	45 mm	60 mm	6,00 mm	0,153 kg

H: height
B: width
L: length
t: material thickness
W: Weight per storage unit



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

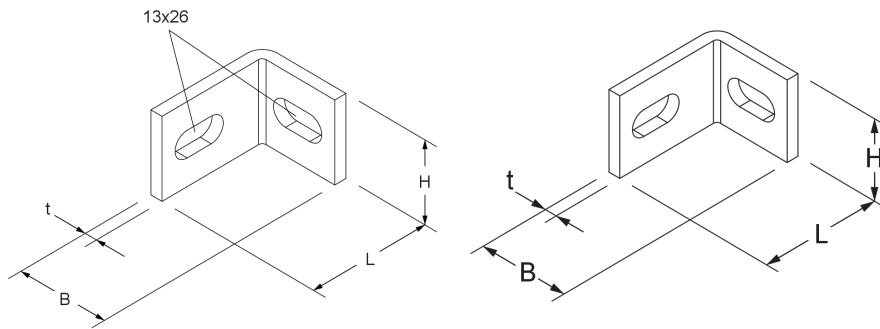

OPTIONAL ACCESSORIES

SD, SES, AM 22, AMF 22, HS18, AM 18, AMF 18, KHA 82, KHA 42, KHA 41, KHA 21, KHAL 41, KHU 40, KHU 57, KHU 60

