

## BODO T

Single outlet with single floor socket, dry-clean, round

The BODO T components are round single outlets with a protective frame for the floor covering. They are equipped with a rotating cover with a cable outlet, a mounting box with a strain relief device, a Schuko socket and an RJ45 data dummy cover. The single outlets are suitable for dry-cleaned rooms with office traffic loads and can be installed in screed and raised or false floor openings. The product is made of high quality plastic (ABS copolymer) and is available in iron grey or graphite black. BODO T has an installation dimension of 122 mm and a minimum installation height of 102 mm.





Products	H <sub>min</sub>	E	P <sub>max</sub>	IP <sub>g</sub>	IP <sub>n</sub>	color	weight
BODO T-G	102 mm	122 mm	1,50 kN	IP-20	IP-30	7011	0,309 kg
incl.:							
1 × UAA-B 22, 1 × UST45-W 1, 1 × UARM-3-1 118, 1 × UG-R							
BODO T-S	102 mm	122 mm	1,50 kN	IP-20	IP-30	9011	0,309 kg
incl.:							
1 × UG-R, 1 × UAA-B 22, 1 × UST45-W 1, 1 × UARM-3-1 118							

**H<sub>min</sub>**: minimum installation height  
**E**: fitting dimension  
**P<sub>max</sub>**: maximum load  
**IP<sub>g</sub>**: IP protection level in used condition  
**IP<sub>n</sub>**: IP protection level in unused condition

## DETAIL AND APPLICATION IMAGES



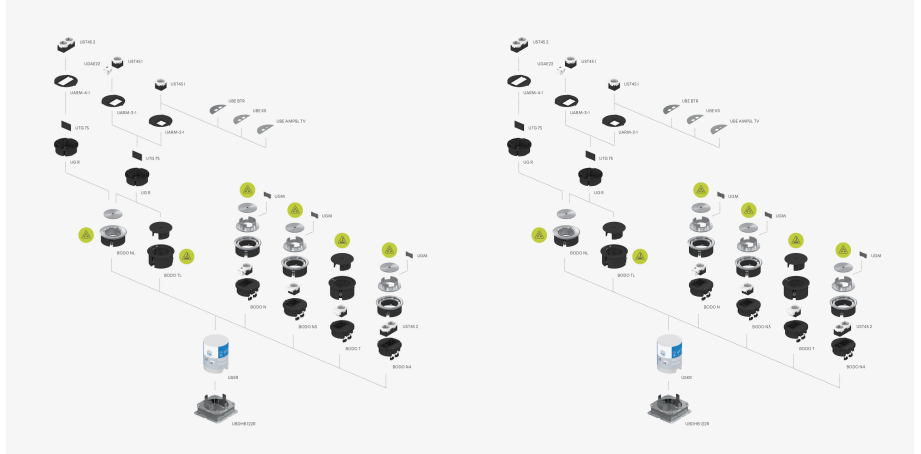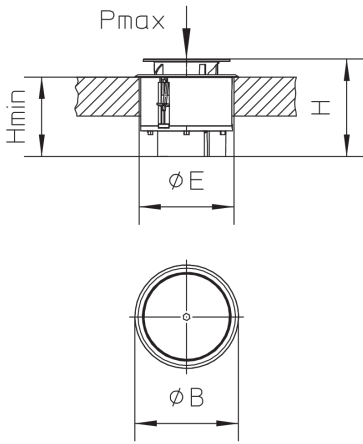

## OPTIONAL ACCESSORIES

USK R122, UDKS R 1, UBDHB 122R, UWZ IS



dry maintained



Load requirements according to, DIN EN 50085

