


DSAXPSP 2

Wire suspension with cross anchor and express closure

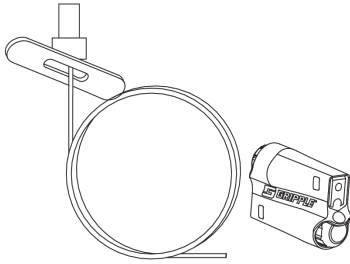

The wire suspension DSAXPSP 2 with cross anchor and express closure is used for suspending cable trays and mesh cable trays from ceilings. It is made of galvanised steel and is available in lengths from 1000 to 10,000 mm. The maximum load is 0.44 kN (Gripple load class 2).

steel, galvanic zinc plated

| Products | L | P _{max} | W |
|---------------|----------|------------------|----------|
| DSAXPSP 21GV | 1000 mm | 0,44 kN | 0,047 kg |
| DSAXPSP 22GV | 2000 mm | 0,44 kN | 0,065 kg |
| DSAXPSP 23GV | 3000 mm | 0,44 kN | 0,083 kg |
| DSAXPSP 24GV | 4000 mm | 0,44 kN | 0,100 kg |
| DSAXPSP 25GV | 5000 mm | 0,44 kN | 0,123 kg |
| DSAXPSP 210GV | 10000 mm | 0,44 kN | 0,210 kg |

L: length

P_{max}: maximum load

W: Weight per storage unit

