


EBW

Corner attachment

The corner attachment EBW is intended for maximum loads of up to 6.50 kN. It is dowelled to concrete columns and is used to attach wide-span formed parts such as bends that allow a horizontal change of direction of up to 90°. The corner fastener is suitable for formed parts and cable trays 200 to 600 mm wide and is made of hot-dip galvanized steel.

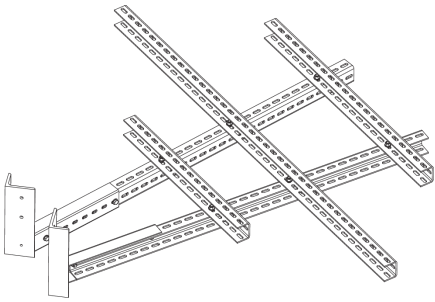

steel, batch/hot-dip galvanized


Products	B	L	P _{max}	weight
EBW 020F	1400 mm	980 mm	6,50 kN	52,380 kg
incl.:				
20 × US 13X24F, 10 × SEM 12F, 10 × SES 12X30F, 1 × KHU 80-08F, 3 × KHU 80-10F, 1 × KHU 80-14F				
EBW 030F	1500 mm	990 mm	6,50 kN	55,050 kg
incl.:				
10 × SES 12X30F, 1 × KHU 80-08F, 3 × KHU 80-11F, 1 × KHU 80-15F, 20 × US 13X24F, 10 × SEM 12F				
EBW 040F	1800 mm	1000 mm	6,50 kN	60,370 kg
incl.:				
20 × US 13X24F, 10 × SEM 12F, 10 × SES 12X30F, 1 × KHU 80-08F, 2 × KHU 80-13F, 1 × KHU 80-12F, 1 × KHU 80-18F				
EBW 050F	1800 mm	1100 mm	6,50 kN	60,380 kg
incl.:				
2 × KHU 80-14F, 1 × KHU 80-18F, 20 × US 13X24F, 10 × SEM 12F, 10 × SES 12X30F, 1 × KHU 80-08F, 1 × KHU 80-10F				
EBW 060F	1900 mm	1200 mm	6,50 kN	64,370 kg
incl.:				
20 × US 13X24F, 10 × SEM 12F, 10 × SES 12X30F, 1 × KHU 80-08F, 1 × KHU 80-11F, 2 × KHU 80-16F, 1 × KHU 80-19F				



PRODUCT INFORMATION

B: width
L: length
P_{max}: maximum load

DETAIL AND APPLICATION IMAGES

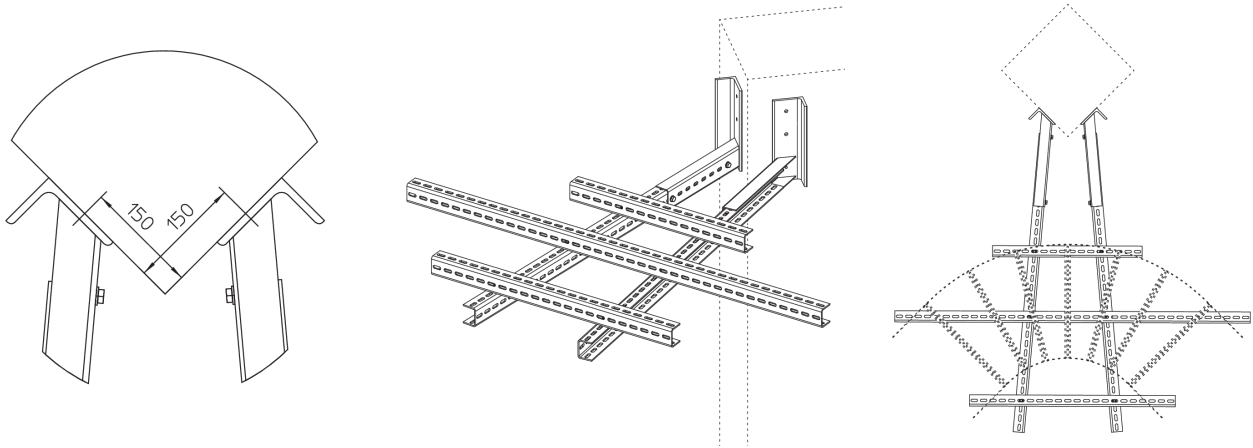

OPTIONAL ACCESSORIES

WPLEAB 100, WPLB 100, WPRB 100, WPREAB 100, WPLEAB 120, WPLB 120, WPRB 120, WPREAB 120,
WPLEAB 150, WPLB 150, WPRB 150, WPREAB 150, SD

