


## GBHK 30

### Short spacer bracket for mesh cable tray size 30

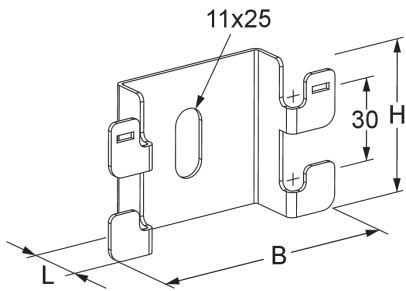

Mesh cable trays G and GI can be mounted horizontally up to a width of 100 on the side longitudinal wires at a distance from the wall using the spacer bracket GBHK 30. It is also possible to mount the mesh track horizontally tilted on the longitudinal wires of the mesh track base, whereby two spacer brackets arranged one above the other are required for larger mesh track widths. The spacer bracket GBHK 30 is suitable for a mesh cable tray grid size (wire spacing) of 30 mm and support spacings of up to 1500 mm. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continuously hot galvanized/Senzimir process

Products	H	B	L	a	W
GBHK 30S	55 mm	94 mm	21 mm	30 mm	0,066 kg

Stainless steel, according to ASTM 304 / BS 304 S 3


Products	H	B	L	a	W
GBHK 30E	55 mm	94 mm	21 mm	30 mm	0,067 kg

**H:** height  
**B:** width  
**L:** length  
**a:** Mesh cable tray spacing  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

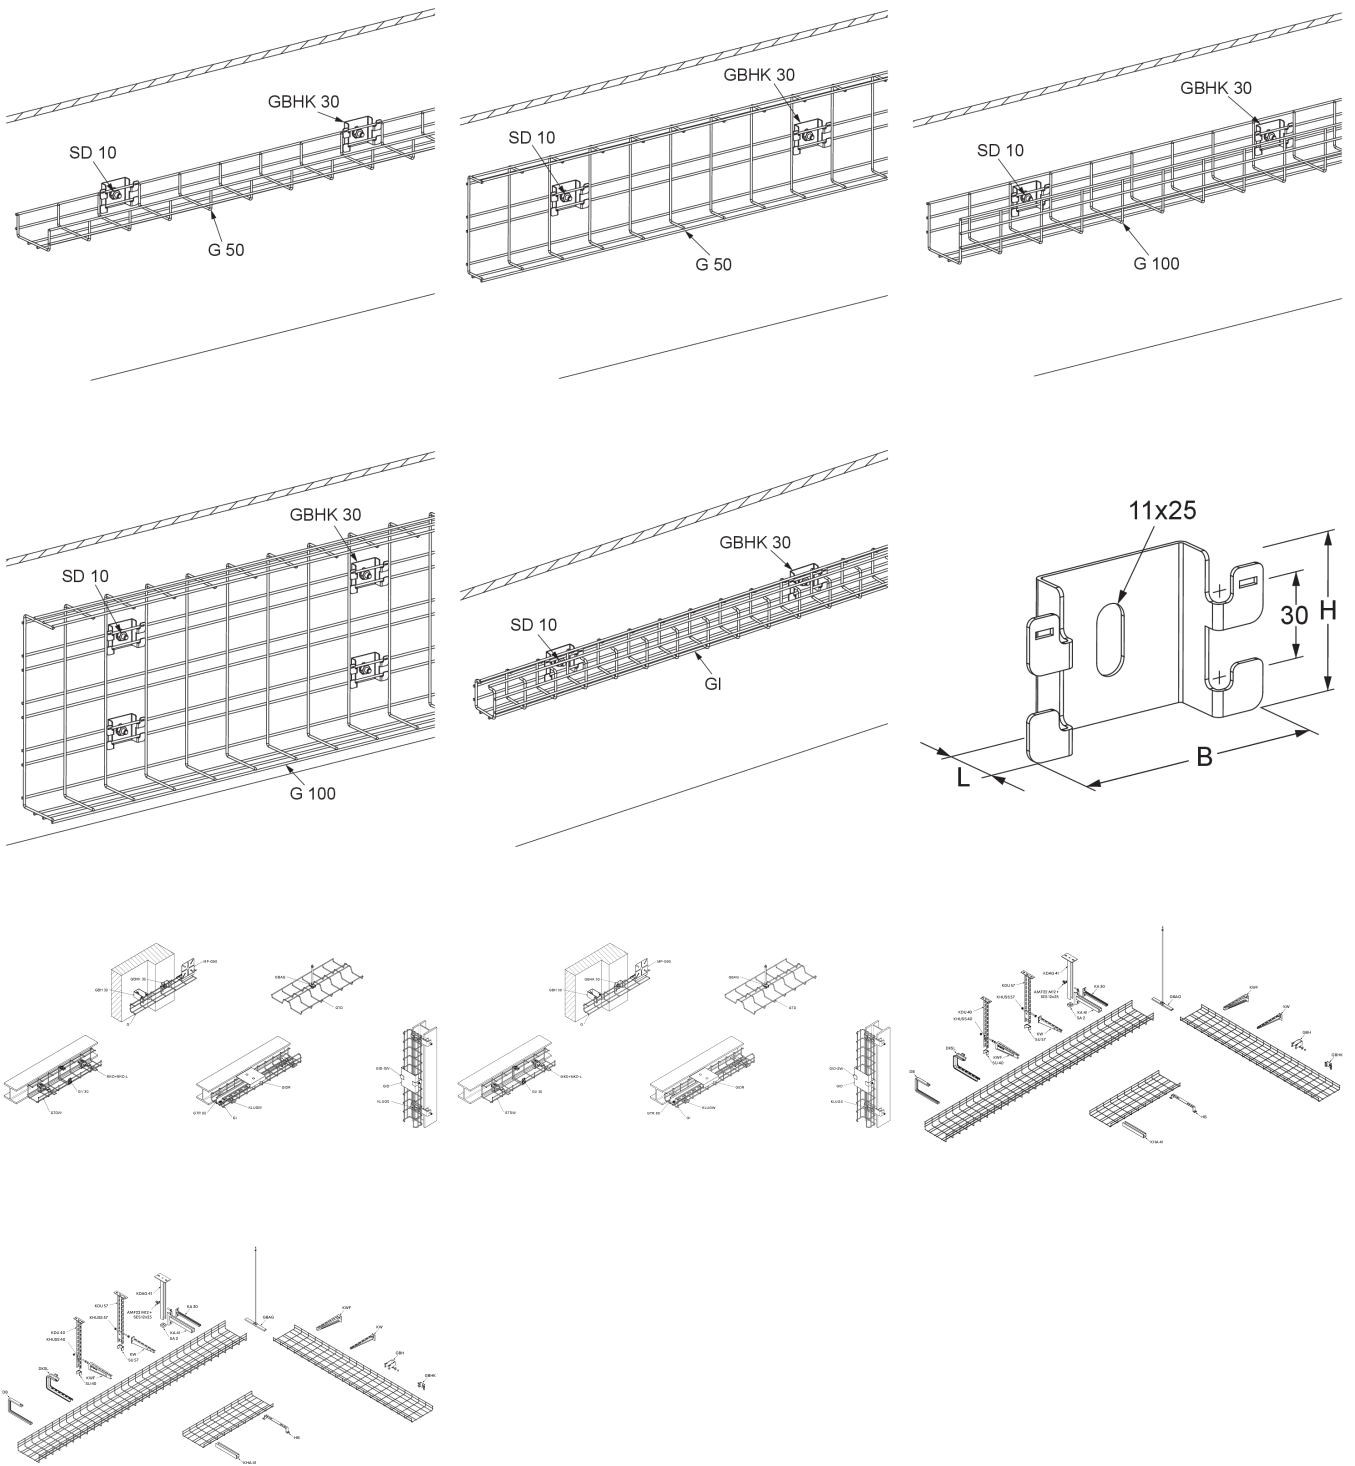

## OPTIONAL ACCESSORIES

SD

