


PRODUCT INFORMATION

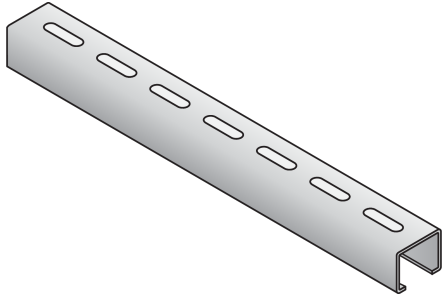

JML K 50/40

Mounting channels, cold-formed, perforated

The mounting channel JML K 50/40 has environmental product declaration EPD-JDL-20200260-IBB1-DE and is made of hot-dip galvanized steel (fv), stainless steel (A4) or rolled plain steel (wb). It has a static load-bearing capacity of the normal force (NRd) of 16.8 kN. The mounting channel is available in lengths of 100 to 6000 mm and is paired with the bolts JB M10 - JB M20. The profile is 50 mm wide and 40 mm high.



steel, bright rolled

Products	L	H _p	B _p	A	weight
LSK5040 R-6000	6000 mm	40 mm	50 mm	4,011 cm ²	19,800 kg

steel, batch/hot-dip galvanized

Products	L	H _p	B _p	A	weight
LSK5040 FV-6000	6000 mm	40 mm	50 mm	4,011 cm ²	21,780 kg

L: length
H_p: profile height
B_p: profile width
A: cross section area

OPTIONAL ACCESSORIES

JGM B



, EPD-JDL-20200260-IBB1-DE

Page 1



PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

