

## JTA RT W 50/30

Anchor channel, hot-rolled, for fastening façades to ceiling tops




The anchor channel JTA RT W 50/30 is made of hot-dip galvanized steel (fv) or stainless steel (A4). The JTA RT W 50/30 has round anchors and reinforcing bars made of reinforcing steel. It is available in profile lengths from 150 to 550 mm and in several variants for the concrete cover and is paired with the bolts JB M10 - JB M20. The filling is made of polyethylene (PE).

steel, batch/hot-dip galvanized

Products	H	B	L	weight
JTARTW5030-0150-01-FVK	100 mm	365 mm	150 mm	1,160 kg
JTARTW5030-0150-02-FVK	100 mm	390 mm	150 mm	1,190 kg
JTARTW5030-0150-03-FVK	100 mm	415 mm	150 mm	1,230 kg
JTARTW5030-0150-04-FVK	100 mm	440 mm	150 mm	1,260 kg
JTARTW5030-0150-05-FVK	100 mm	465 mm	150 mm	1,300 kg
JTARTW5030-0150-06-FVK	100 mm	490 mm	150 mm	1,330 kg

**H:** height  
**B:** width  
**L:** length

## DETAIL AND APPLICATION IMAGES

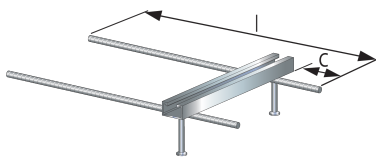

## OPTIONAL ACCESSORIES

JGM B

Page 1





PohlCon GmbH  
Nobelstraße 51 | 12057 Berlin  
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | [contact@pohlcon.com](mailto:contact@pohlcon.com)

