


KATB

T-joint connector plate

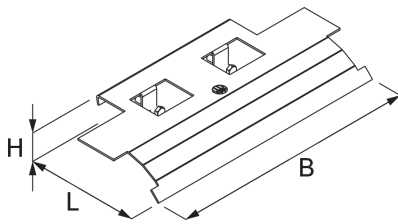

The T-joint connector plate is used for cable protection on non-cut T-connections of RG, LGG and WPL/WPR to enable cable-friendly installation. It is used to guide cables over the rail of the cable support system without sharp edges. The sheet metal is placed on the rail and screwed in place with hexagon head screw(s) SES.

steel, continuously hot galvanized/Sendzimir process


Products	H	B	L	t	W
KATB-200S	31 mm	144 mm	216 mm	2 mm	0,394 kg
incl.:					
1 × SES 6X30					
KATB-300S	31 mm	144 mm	316 mm	2 mm	0,627 kg
incl.:					
2 × SES 6X30					
KATB-400S	31 mm	144 mm	416 mm	2 mm	0,881 kg
incl.:					
2 × SES 6X30					
KATB-500S	31 mm	144 mm	516 mm	2 mm	1,135 kg
incl.:					
2 × SES 6X30					
KATB-600S	31 mm	144 mm	616 mm	2 mm	1,389 kg
incl.:					
2 × SES 6X30					

H: height
B: width
L: length
t: material thickness
W: Weight per storage unit



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

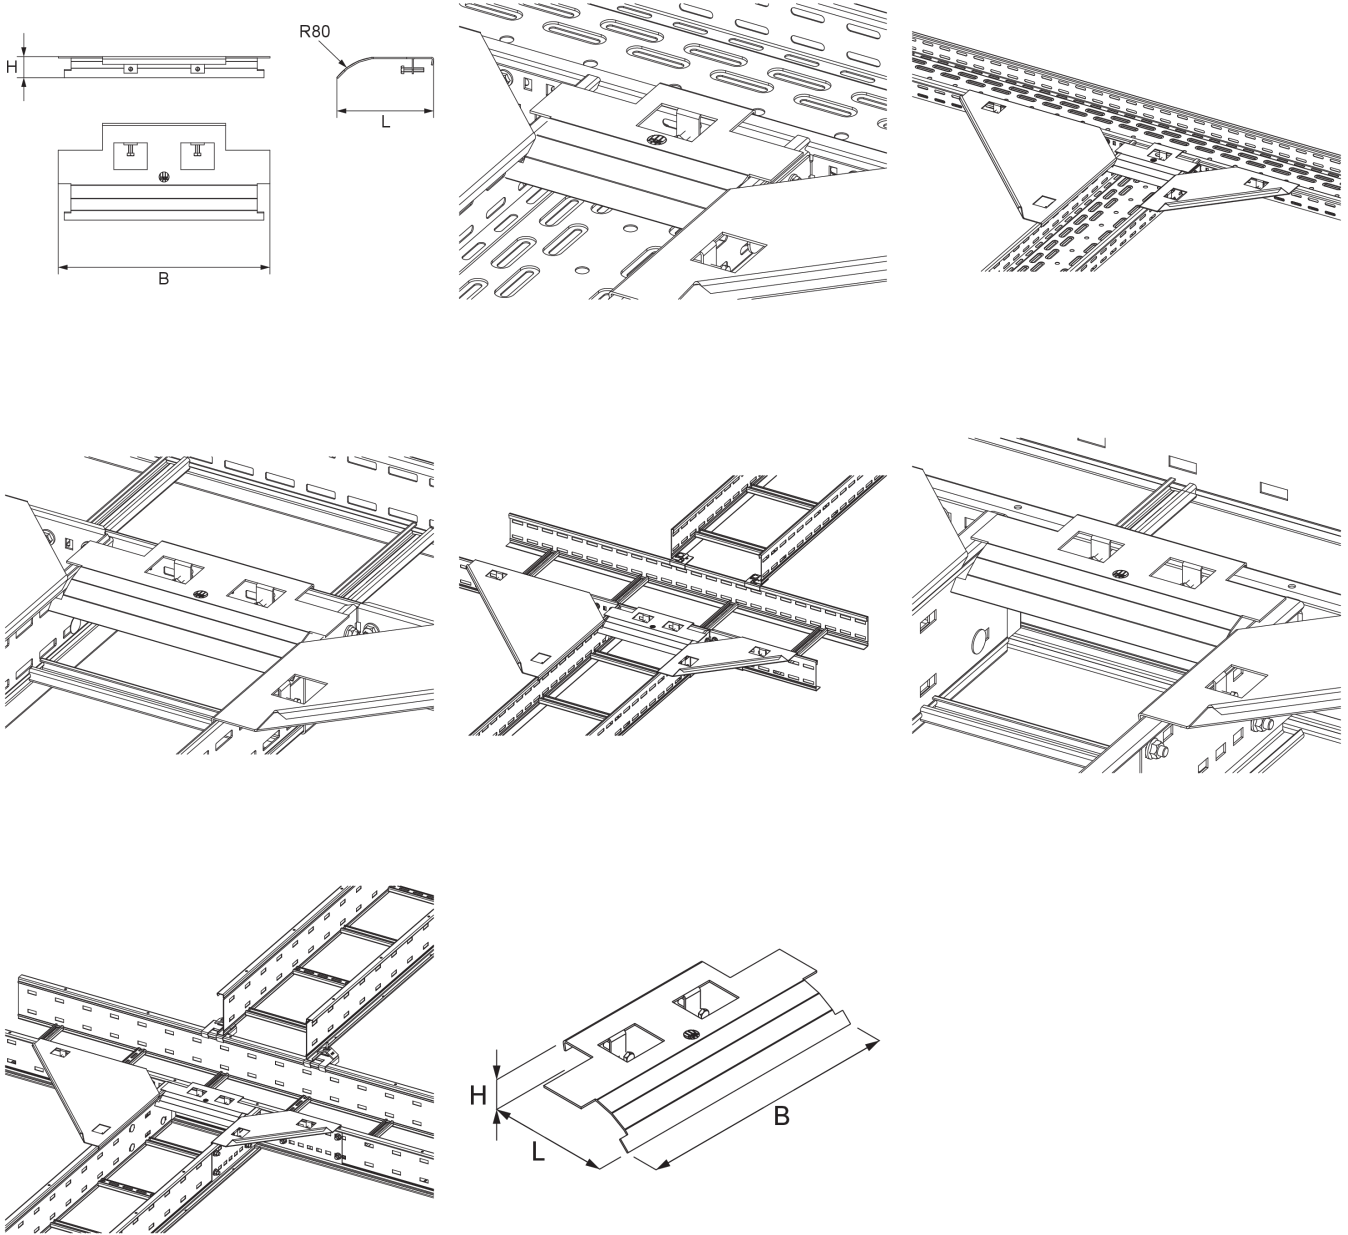

OPTIONAL ACCESSORIES

RGV 35, RGV 60, RGV 85, RGV 110, KATBS





PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com

