


KATBS

T-joint connector plate, sideways

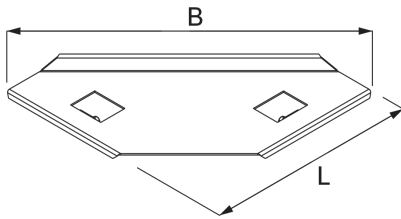

The side T-joint connector plate KATBS is used for cable protection on non-cut T-connections of RG, LGG and WPL/WPR to enable cable-friendly installation. It is used to guide cables over the rail of the cable support system without sharp edges. The sheet metal is placed on the rail and screwed in place with hexagon head screw(s) SES.

steel, continuously hot galvanized/Sendzimir process


Products	H	B	L	t	W
KATBS-300S	34 mm	300 mm	436 mm	2 mm	1,007 kg
incl.:					
2 × SES 6X30					
KATBS-500S	34 mm	500 mm	719 mm	2 mm	2,633 kg
incl.:					
2 × SES 6X30					


H: height
B: width
L: length
t: material thickness
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

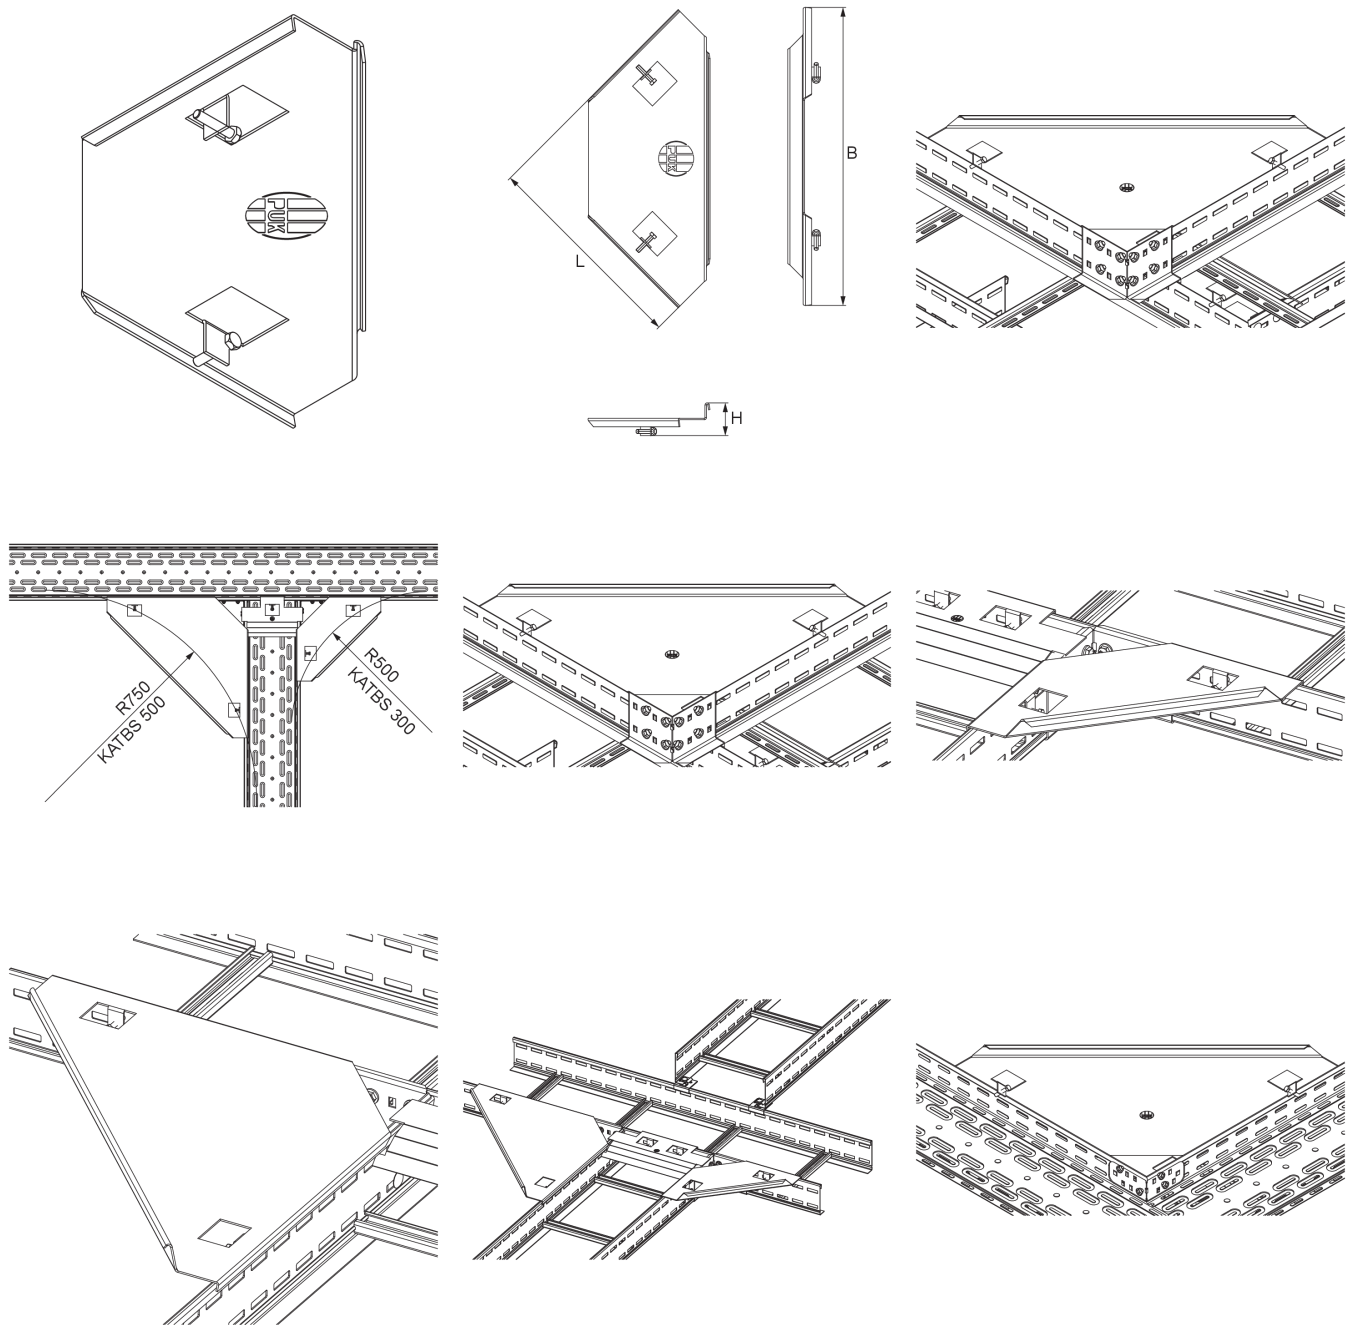

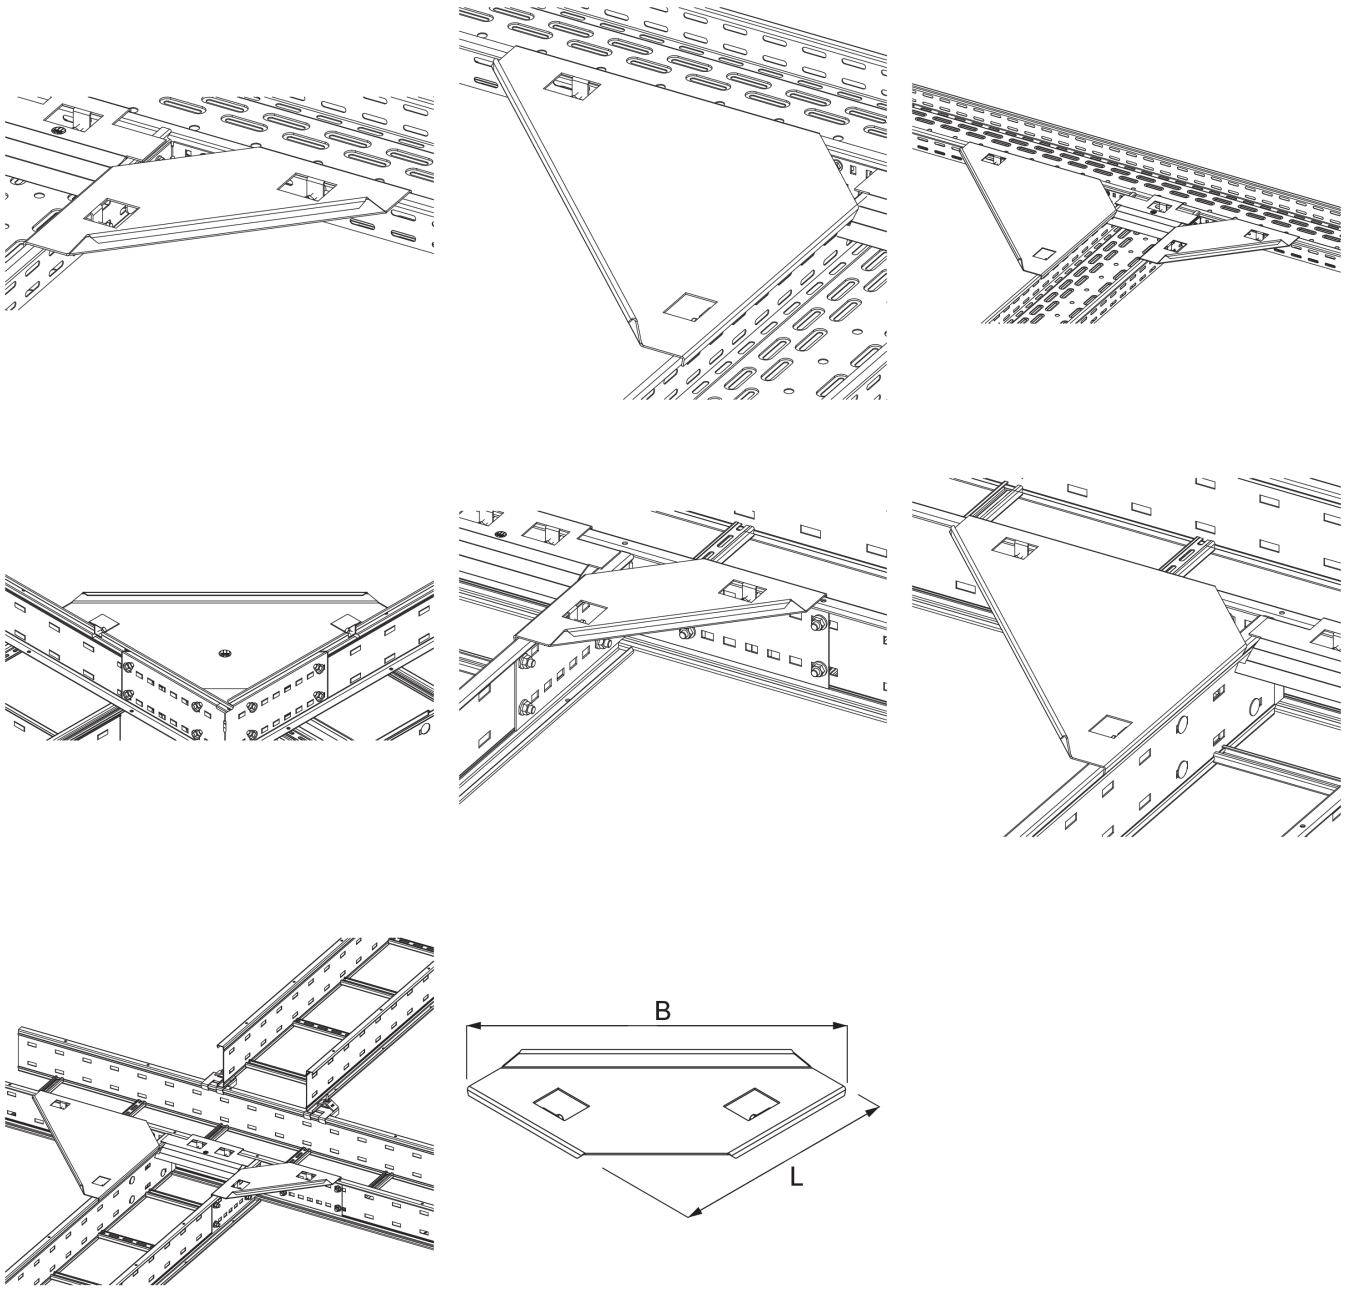

OPTIONAL ACCESSORIES

WPVH 100, WPVH 120, WPVH 150, KATB

