


PRODUCT INFORMATION

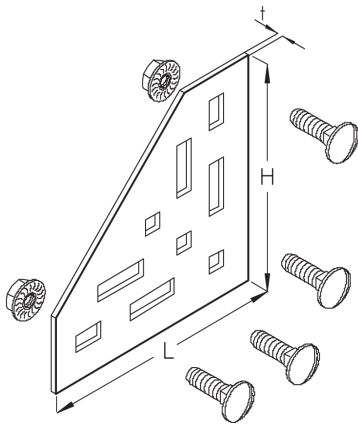

KB

Junction plate

The junction plate KB is used to connect U profiles with corner bracing. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, batch/hot-dip galvanized

Products	H	L	t		W
KB F	150 mm	150 mm	3,00 mm	90 °	0,484 kg
incl.:					
4 × KLS 10X20F					

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	L	t		W
KB E	150 mm	150 mm	2,00 mm	90 °	0,464 kg
incl.:					
4 × KLS 10X20E					

H: height
L: length
t: material thickness
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

