


## KHA 2

50x31 mm profile rail, perforated

The profile rail KHA 2 consists of a C+ profile 50 x 31 mm with continuous perforation and a slot width of 22 mm (material thickness = 3.25 mm). It is made of hot-dip galvanized steel and is available in lengths of 500 or 6000 mm.

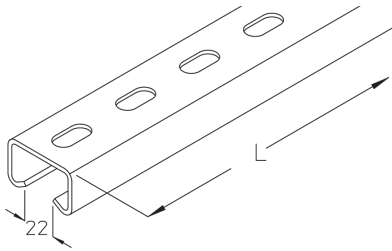

steel, batch/hot-dip galvanized

Products	L	H <sub>p</sub>	B <sub>p</sub>	t	W
KHA 2-05F	500 mm	31 mm	50 mm	3,25 mm	1,500 kg
KHA 2-10F	1000 mm	31 mm	50 mm	3,25 mm	3,000 kg
KHA 2-15F	1500 mm	31 mm	50 mm	3,25 mm	4,500 kg
KHA 2-20F	2000 mm	31 mm	50 mm	3,25 mm	6,000 kg
KHA 2-30F	3000 mm	31 mm	50 mm	3,25 mm	9,000 kg
KHA 2-60F	6000 mm	31 mm	50 mm	3,25 mm	17,900 kg




**L:** length  
**H<sub>p</sub>:** profile height  
**B<sub>p</sub>:** profile width  
**t:** material thickness  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

---

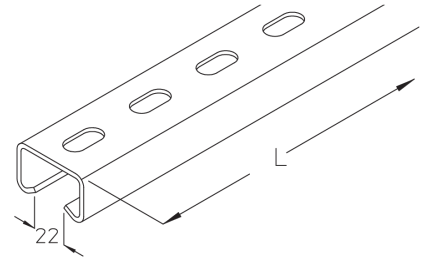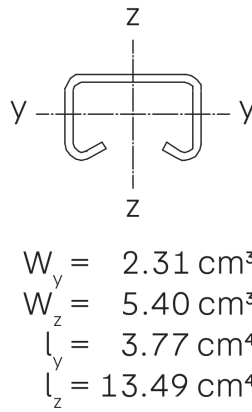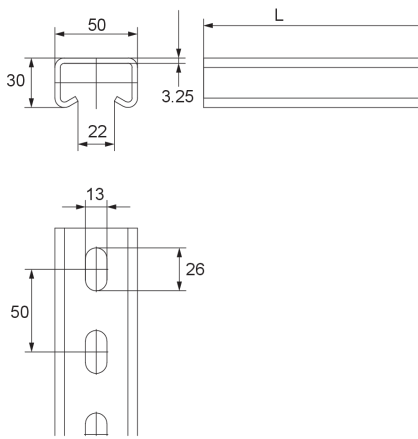

## OPTIONAL ACCESSORIES

HS22, SKS H

