


## KHA 21

41x21 mm profile rail, perforated

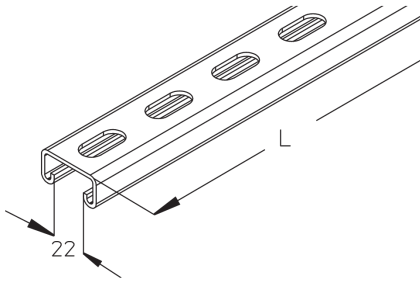

The mounting channel KHA 21 consists of a C+ profile 41 x 21 mm with continuous perforation and a slot width of 22 mm made from material 2.5 mm thick. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of up to 6000 mm.

steel, batch/hot-dip galvanized

| Products   | L       | profile height | profile width | t       | weight    |
|------------|---------|----------------|---------------|---------|-----------|
| KHA 21-30F | 3000 mm | 21 mm          | 41 mm         | 2,50 mm | 5,320 kg  |
| KHA 21-60F | 6000 mm | 21 mm          | 41 mm         | 2,50 mm | 10,639 kg |

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

| Products    | L       | profile height | profile width | t       | weight   |
|-------------|---------|----------------|---------------|---------|----------|
| KHA 21-30E4 | 3000 mm | 21 mm          | 41 mm         | 2,50 mm | 4,970 kg |
| KHA 21-60E4 | 6000 mm | 21 mm          | 41 mm         | 2,50 mm | 9,943 kg |


L: length  
t: material thickness

## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

---

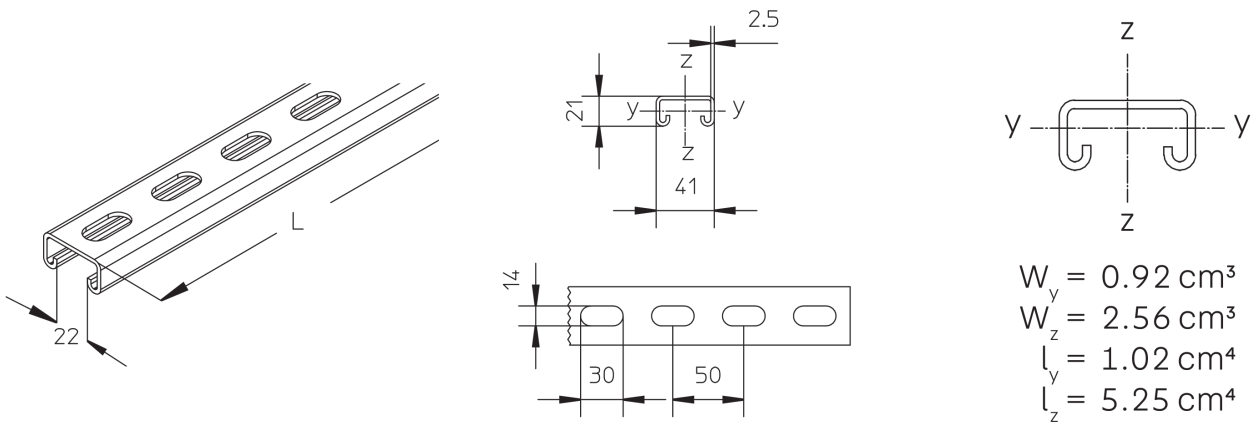

## OPTIONAL ACCESSORIES

AKL, AM 22, BGA 41, BGA 41/2, RUS 41, SKS A, SA 1, SAI 21, KA 41, KA 30, AV, BL 5, AVL, AVE, AVA, AVB, AVLW, AVAW

