


KHA 7

39.5x22 mm profile rail, perforated, maintenance of function

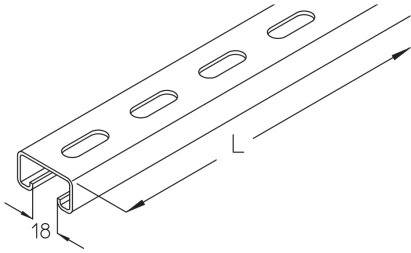

steel, continuously hot galvanized/Sendzimir process

Products	L	H _p	B _p	t	W
KHA 7-02S	200 mm	22 mm	39,5 mm	1,50 mm	0,210 kg
KHA 7-03S	300 mm	22 mm	39,5 mm	1,50 mm	0,310 kg
KHA 7-04S	400 mm	22 mm	39,5 mm	1,50 mm	0,410 kg
KHA 7-05S	500 mm	22 mm	39,5 mm	1,50 mm	0,510 kg
KHA 7-06S	600 mm	22 mm	39,5 mm	1,50 mm	0,610 kg
KHA 7-07S	700 mm	22 mm	39,5 mm	1,50 mm	0,780 kg
KHA 7-08S	800 mm	22 mm	39,5 mm	1,50 mm	0,834 kg
KHA 7-09S	900 mm	22 mm	39,5 mm	1,50 mm	1,000 kg
KHA 7-10S	1000 mm	22 mm	39,5 mm	1,50 mm	1,050 kg
KHA 7-11S	1100 mm	22 mm	39,5 mm	1,50 mm	1,150 kg
KHA 7-12S	1200 mm	22 mm	39,5 mm	1,50 mm	1,260 kg
KHA 7-13S	1300 mm	22 mm	39,5 mm	1,50 mm	1,360 kg
KHA 7-14S	1400 mm	22 mm	39,5 mm	1,50 mm	1,470 kg
KHA 7-15S	1500 mm	22 mm	39,5 mm	1,50 mm	1,570 kg
KHA 7-20S	2000 mm	22 mm	39,5 mm	1,50 mm	2,200 kg
KHA 7-30S	3000 mm	22 mm	39,5 mm	1,50 mm	3,200 kg
KHA 7-60S	6000 mm	22 mm	39,5 mm	1,50 mm	6,300 kg

L: length
H_p: profile height



Page 1




PRODUCT INFORMATION

B_p: profile width
t: material thickness
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

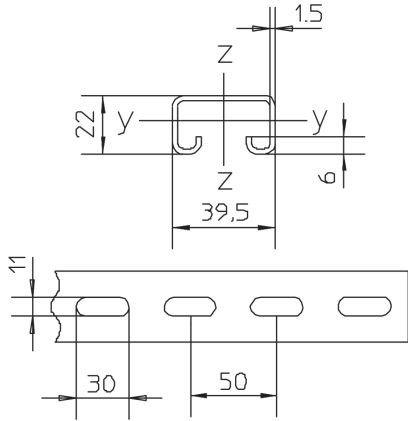

$$\begin{aligned}W_y &= 0.80 \text{ cm}^3 \\W_z &= 1.69 \text{ cm}^3 \\I_y &= 0.91 \text{ cm}^4 \\I_z &= 3.34 \text{ cm}^4\end{aligned}$$

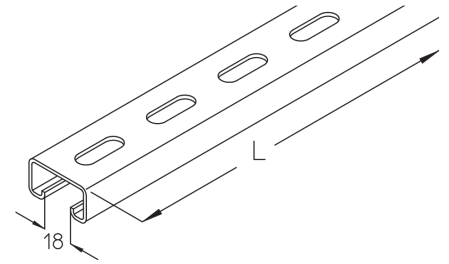

OPTIONAL ACCESSORIES

ASK 8, AC

