


## KHA 8

40x22 mm profile rail, perforated

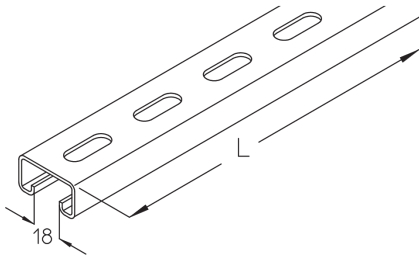

The profile rail KHA 8 consists of a C+ profile 40 x 22 mm with continuous perforation and a slot width of 18 mm (material thickness = 2 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 100 to 6000 mm.

steel, galvanic zinc plated

Products	L	H <sub>p</sub>	B <sub>p</sub>	t	weight
KHA 8-03GV	300 mm	22 mm	40 mm	2,00 mm	0,433 kg
KHA 8-06GV	600 mm	22 mm	40 mm	2,00 mm	0,866 kg
KHA 8-30GV	3000 mm	22 mm	40 mm	2,00 mm	4,330 kg

steel, batch/hot-dip galvanized

Products	L	H <sub>p</sub>	B <sub>p</sub>	t	weight
KHA 8-01F	100 mm	22 mm	40 mm	2,00 mm	0,145 kg
KHA 8-02F	200 mm	22 mm	40 mm	2,00 mm	0,310 kg
KHA 8-03F	300 mm	22 mm	40 mm	2,00 mm	0,460 kg
KHA 8-04F	400 mm	22 mm	40 mm	2,00 mm	0,620 kg
KHA 8-05F	500 mm	22 mm	40 mm	2,00 mm	0,770 kg
KHA 8-06F	600 mm	22 mm	40 mm	2,00 mm	0,930 kg
KHA 8-07F	700 mm	22 mm	40 mm	2,00 mm	1,080 kg
KHA 8-08F	800 mm	22 mm	40 mm	2,00 mm	1,240 kg
KHA 8-09F	900 mm	22 mm	40 mm	2,00 mm	1,390 kg
KHA 8-10F	1000 mm	22 mm	40 mm	2,00 mm	1,540 kg
KHA 8-11F	1100 mm	22 mm	40 mm	2,00 mm	1,690 kg
KHA 8-12F	1200 mm	22 mm	40 mm	2,00 mm	1,850 kg
KHA 8-13F	1300 mm	22 mm	40 mm	2,00 mm	2,010 kg

Page 1



# PRODUCT INFORMATION

Products	L	H <sub>p</sub>	B <sub>p</sub>	t	weight
KHA 8-14F	1400 mm	22 mm	40 mm	2,00 mm	2,160 kg
KHA 8-15F	1500 mm	22 mm	40 mm	2,00 mm	2,320 kg
KHA 8-20F	2000 mm	22 mm	40 mm	2,00 mm	3,090 kg
KHA 8-30F	3000 mm	22 mm	40 mm	2,00 mm	4,630 kg
KHA 8-60F	6000 mm	22 mm	40 mm	2,00 mm	8,270 kg

## Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11




Products	L	H <sub>p</sub>	B <sub>p</sub>	t	weight
KHA 8-02E4	200 mm	22 mm	40 mm	2,00 mm	0,290 kg
KHA 8-03E4	300 mm	22 mm	40 mm	2,00 mm	0,440 kg
KHA 8-04E4	400 mm	22 mm	40 mm	2,00 mm	0,590 kg
KHA 8-05E4	500 mm	22 mm	40 mm	2,00 mm	0,740 kg
KHA 8-06E4	600 mm	22 mm	40 mm	2,00 mm	0,880 kg
KHA 8-07E4	700 mm	22 mm	40 mm	2,00 mm	1,030 kg
KHA 8-08E4	800 mm	22 mm	40 mm	2,00 mm	1,180 kg
KHA 8-09E4	900 mm	22 mm	40 mm	2,00 mm	1,320 kg
KHA 8-10E4	1000 mm	22 mm	40 mm	2,00 mm	1,470 kg
KHA 8-11E4	1100 mm	22 mm	40 mm	2,00 mm	1,620 kg
KHA 8-12E4	1200 mm	22 mm	40 mm	2,00 mm	1,760 kg

**L:** length  
**H<sub>p</sub>:** profile height  
**B<sub>p</sub>:** profile width  
**t:** material thickness


## DETAIL AND APPLICATION IMAGES



# PRODUCT INFORMATION

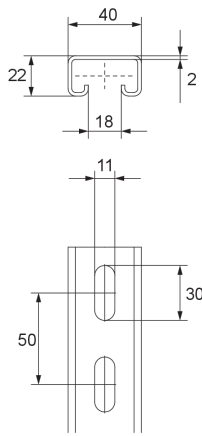

$$\begin{aligned}W_y &= 1.05 \text{ cm}^3 \\W_z &= 2.24 \text{ cm}^3 \\I_y &= 1.18 \text{ cm}^4 \\I_z &= 4.48 \text{ cm}^4\end{aligned}$$

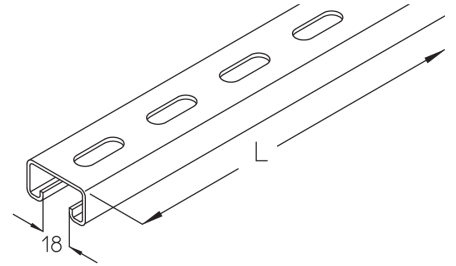

## OPTIONAL ACCESSORIES

SA 1, SAI 21, HS18, AM 18, AMF 18, AMA 18, ARS 18-KHA, ASK 8, RP

