


KHB 7

30x15 mm profile rail, perforated

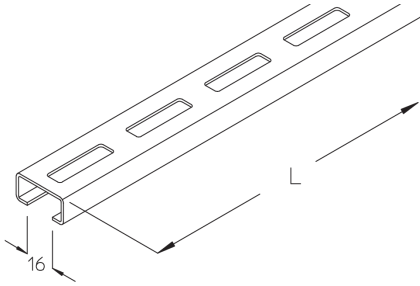

The perforated profile rail KHB 7 consists of a C profile 30 x 15 mm with a slot width of 16 mm (material thickness = 1.5 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications. It is available in lengths of 2000, 3000 or 6000 mm.

steel, continuously hot galvanized/Sendzimir process

Products	L	H _p	B _p	t	W
KHB 7-30S	3000 mm	15 mm	30 mm	1,50 mm	2,004 kg
KHB 7-60S	6000 mm	15 mm	30 mm	1,50 mm	4,006 kg

steel, batch/hot-dip galvanized

Products	L	H _p	B _p	t	W
KHB 7-30F	3000 mm	15 mm	30 mm	1,50 mm	2,160 kg
KHB 7-60F	6000 mm	15 mm	30 mm	1,50 mm	4,286 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	L	H _p	B _p	t	W
KHB 7-20E	2000 mm	15 mm	30 mm	1,50 mm	1,344 kg
KHB 7-30E	3000 mm	15 mm	30 mm	1,50 mm	2,100 kg
KHB 7-60E	6000 mm	15 mm	30 mm	1,50 mm	4,031 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11





PRODUCT INFORMATION


Products	L	H _p	B _p	t	W
KHB 7-02E4	200 mm	15 mm	30 mm	1,50 mm	0,136 kg
KHB 7-03E4	300 mm	15 mm	30 mm	1,50 mm	0,204 kg
KHB 7-04E4	400 mm	15 mm	30 mm	1,50 mm	0,272 kg
KHB 7-05E4	600 mm	15 mm	30 mm	1,50 mm	0,340 kg
KHB 7-06E4	500 mm	15 mm	30 mm	1,50 mm	0,408 kg

L: length
H_p: profile height
B_p: profile width
t: material thickness
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

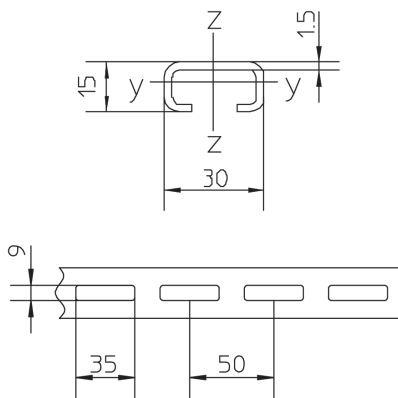

$$\begin{aligned}
 W_y &= 0.30 \text{ cm}^3 \\
 W_z &= 0.83 \text{ cm}^3 \\
 I_y &= 0.25 \text{ cm}^4 \\
 I_z &= 1.25 \text{ cm}^4
 \end{aligned}$$

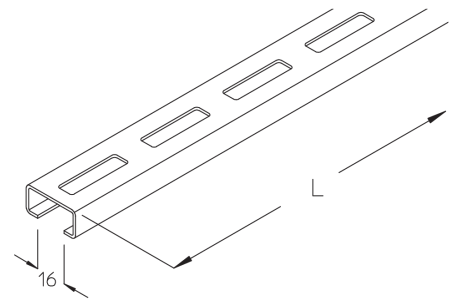

OPTIONAL ACCESSORIES

HS16, AM 16, ARS 16-KHB

