


KLUGS

Clamping fasteners, universal, welded, vertical

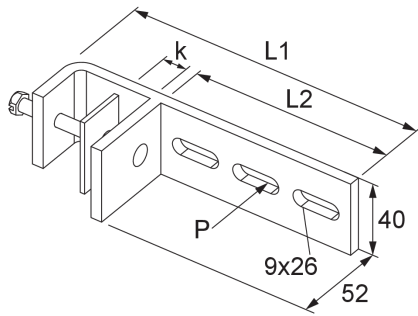

The welded clamp fastener KLUGS is used to fasten mesh cable trays and cable trays on vertical steel beams. The tightening torque to be used is 10 Nm. The clamping range extends from 5 - 33 mm. We provide components in various materials and surface finishes to ensure that various corrosion protection requirements for different areas of application are met.

steel, batch/hot-dip galvanized

Products	H	B	L	L1	L2	t	k	M	weight
KLUGS 10F	52 mm	40 mm	149 mm	149 mm	97 mm	6,00 mm	5 - 33 mm	10 Nm	0,461 kg
KLUGS 20F	52 mm	40 mm	249 mm	249 mm	197 mm	6,00 mm	5 - 33 mm	10 Nm	0,641 kg
KLUGS 30F	52 mm	40 mm	349 mm	349 mm	297 mm	6,00 mm	5 - 33 mm	10 Nm	0,821 kg

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	L	L1	L2	t	k	M	weight
KLUGS 10E	52 mm	40 mm	149 mm	149 mm	97 mm	6,00 mm	5 - 33 mm	10 Nm	0,436 kg
KLUGS 20E	52 mm	40 mm	249 mm	249 mm	197 mm	6,00 mm	5 - 33 mm	10 Nm	0,608 kg
KLUGS 30E	52 mm	40 mm	349 mm	349 mm	297 mm	6,00 mm	5 - 33 mm	10 Nm	0,779 kg

H: height
B: width
L: length
L1: length 1
L2: length 2
t: material thickness
k: clamping range
M: torque



PRODUCT INFORMATION

DETAIL AND APPLICATION IMAGES

