

KTS

Bracket, heavy, KDI/KHI

The bracket KTS is attached to bracket holder KDI or KHI and is designed for maximum loads of up to 7 kN, depending on the bracket length. They are made of hot-dip galvanised steel.

steel, batch/hot-dip galvanized

Products	H	B1	B2	L	P _{max}	W
KTS 020F	180 mm	200 mm	280 mm	284 mm	7,00 kN	1,588 kg
KTS 030F	180 mm	300 mm	380 mm	384 mm	6,30 kN	1,985 kg
KTS 040F	180 mm	400 mm	480 mm	484 mm	5,50 kN	2,271 kg
KTS 050F	180 mm	500 mm	580 mm	584 mm	4,90 kN	2,673 kg
KTS 060F	180 mm	600 mm	680 mm	684 mm	4,30 kN	3,010 kg
KTS 070F	180 mm	600 mm	780 mm	784 mm	3,60 kN	3,440 kg
KTS 080F	180 mm	600 mm	880 mm	884 mm	3,00 kN	3,805 kg
KTS 090F	180 mm	600 mm	980 mm	984 mm	2,30 kN	4,216 kg
KTS 100F	180 mm	600 mm	1080 mm	1084 mm	1,70 kN	4,471 kg

H: height

B1: width

B2: width

L: length


P_{max}: maximum load

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

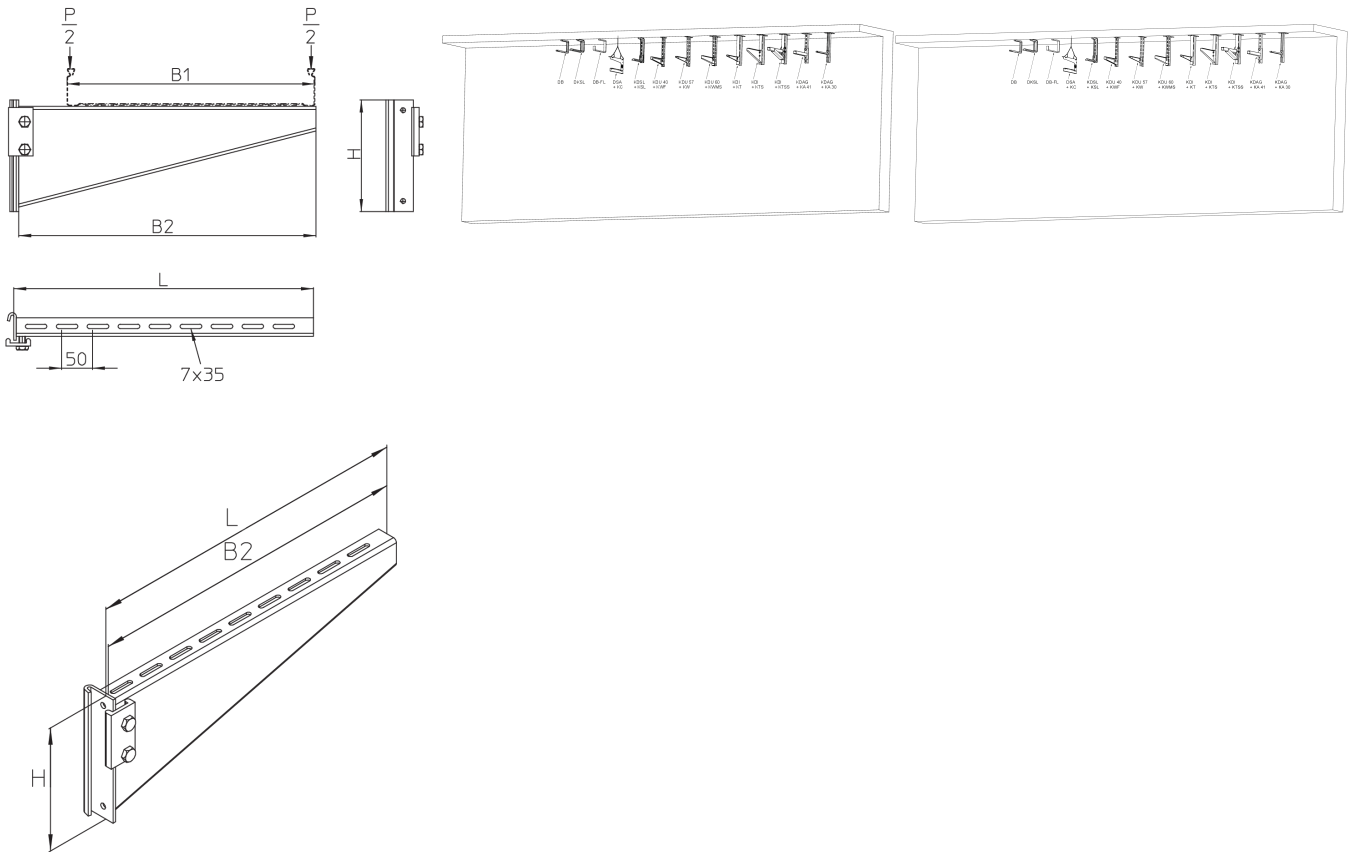

OPTIONAL ACCESSORIES

KLU, WPHS-K, WLHS, WLKL

