


LD-SW

Cable ladder storm protection bracket

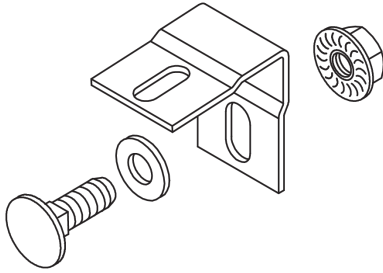

The storm protection bracket LD-SW is used to additionally secure the cable ladder cover when used outdoors. It is placed on top of the cover and bolted in place. The necessary fastening set is included. At least 6 safety elements must be used per 3 metres of cover according to the installation instructions. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, batch/hot-dip galvanized

Products	H	B	L	t	W
LD-SW F	46 mm	30 mm	30 mm	2,00 mm	0,057 kg
incl.:					
1 × KLS 8X16E, 1 × UVS M8					

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	L	t	W
LD-SW E	46 mm	30 mm	30 mm	2,00 mm	0,055 kg
incl.:					
1 × KLS 8X16E, 1 × UVS M8					

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Products	H	B	L	t	W
LD-SW E4	46 mm	30 mm	30 mm	2,00 mm	0,058 kg
incl.:					
1 × FRS 8X25E4, 1 × SEM 8E4, 1 × UVS M8, 1 × US 8X17E4					



PRODUCT INFORMATION

H: height
B: width
L: length
t: material thickness
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES

