


LGGS 60

Cable ladder, L profile, heavy, height = 60 mm



The perforated and welded cable ladders LGGS 60 have rails 60 mm high and are available in ladder widths of 200 to 600 mm and in lengths of 3000 and 6000 mm. The rungs consist of profile rails (30 x 15 mm). We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

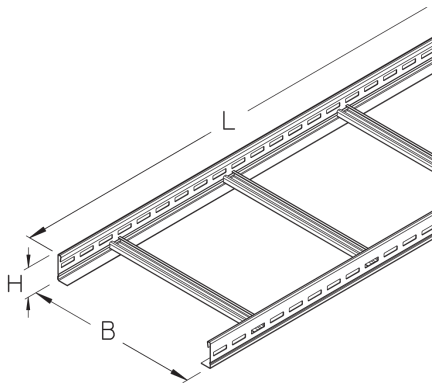

steel, continuously hot galvanized/Senzimir process

Products	H	B	L	A	Q_{LK}	weight
LGGS 60-20-3S	60 mm	200 mm	3000 mm	81 cm ²	0,23 kN/m	10,410 kg
LGGS 60-30-3S	60 mm	300 mm	3000 mm	122 cm ²	0,34 kN/m	11,290 kg
LGGS 60-40-3S	60 mm	400 mm	3000 mm	162 cm ²	0,45 kN/m	12,170 kg
LGGS 60-50-3S	60 mm	500 mm	3000 mm	203 cm ²	0,57 kN/m	13,060 kg
LGGS 60-60-3S	60 mm	600 mm	3000 mm	243 cm ²	0,68 kN/m	13,940 kg
LGGS 60-20S	60 mm	200 mm	6000 mm	81 cm ²	0,23 kN/m	20,810 kg
LGGS 60-30S	60 mm	300 mm	6000 mm	122 cm ²	0,34 kN/m	22,580 kg
LGGS 60-40S	60 mm	400 mm	6000 mm	162 cm ²	0,45 kN/m	24,350 kg
LGGS 60-50S	60 mm	500 mm	6000 mm	203 cm ²	0,57 kN/m	26,120 kg
LGGS 60-60S	60 mm	600 mm	6000 mm	243 cm ²	0,68 kN/m	27,860 kg

steel, batch/hot-dip galvanized

Products	H	B	L	A	Q_{LK}	weight
LGGS 60-20-3F	60 mm	200 mm	3000 mm	81 cm ²	0,23 kN/m	11,130 kg
LGGS 60-30-3F	60 mm	300 mm	3000 mm	122 cm ²	0,34 kN/m	12,080 kg
LGGS 60-40-3F	60 mm	400 mm	3000 mm	162 cm ²	0,45 kN/m	13,030 kg
LGGS 60-50-3F	60 mm	500 mm	3000 mm	203 cm ²	0,57 kN/m	13,970 kg
LGGS 60-60-3F	60 mm	600 mm	3000 mm	243 cm ²	0,68 kN/m	14,920 kg
LGGS 60-20F	60 mm	200 mm	6000 mm	81 cm ²	0,23 kN/m	22,270 kg



PRODUCT INFORMATION

Products	H	B	L	A	Q _{LK}	weight
LGGS 60-30F	60 mm	300 mm	6000 mm	122 cm ²	0,34 kN/m	24,160 kg
LGGS 60-40F	60 mm	400 mm	6000 mm	162 cm ²	0,45 kN/m	26,050 kg
LGGS 60-50F	60 mm	500 mm	6000 mm	203 cm ²	0,57 kN/m	27,950 kg
LGGS 60-60F	60 mm	600 mm	6000 mm	243 cm ²	0,68 kN/m	29,840 kg

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11


Products	H	B	L	A	Q _{LK}	weight
LGGS 60-20-3E4	60 mm	200 mm	3000 mm	81 cm ²	0,23 kN/m	10,610 kg
LGGS 60-30-3E4	60 mm	300 mm	3000 mm	122 cm ²	0,34 kN/m	11,510 kg
LGGS 60-40-3E4	60 mm	400 mm	3000 mm	162 cm ²	0,45 kN/m	12,410 kg
LGGS 60-50-3E4	60 mm	500 mm	3000 mm	203 cm ²	0,57 kN/m	13,310 kg
LGGS 60-60-3E4	60 mm	600 mm	3000 mm	243 cm ²	0,68 kN/m	14,210 kg
LGGS 60-20E4	60 mm	200 mm	6000 mm	81 cm ²	0,23 kN/m	21,210 kg
LGGS 60-30E4	60 mm	300 mm	6000 mm	122 cm ²	0,34 kN/m	23,010 kg
LGGS 60-40E4	60 mm	400 mm	6000 mm	162 cm ²	0,45 kN/m	24,810 kg
LGGS 60-50E4	60 mm	500 mm	6000 mm	203 cm ²	0,57 kN/m	26,620 kg
LGGS 60-60E4	60 mm	600 mm	6000 mm	243 cm ²	0,68 kN/m	28,420 kg

H: height
B: width
L: length
A: cross section area
Q_{LK}:


DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

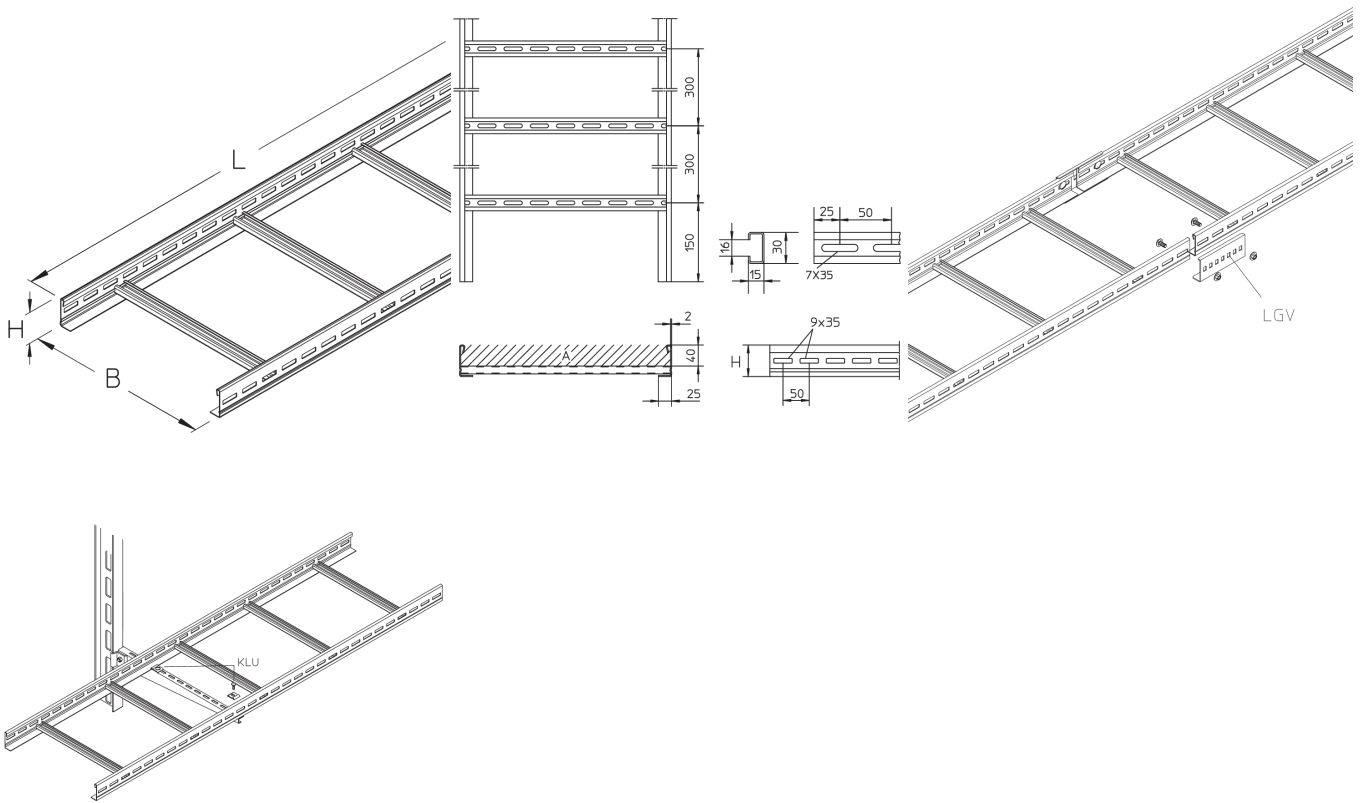

LOAD DIAGRAM

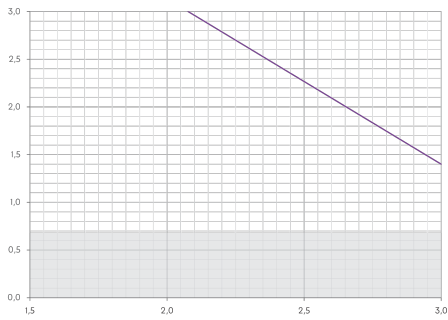

OPTIONAL ACCESSORIES

LGIB 60, LGAB 60, LGAA 60, LGA 60, LGK 60, LGVB 60, LGV 60, LGVH 60, LGVV 60, LGTR 60, SL 60, LGKAB, H, LD, LDR



