


## LGIB-BS 60

Cable ladder internal bend, height = 60 mm, maintenance of function

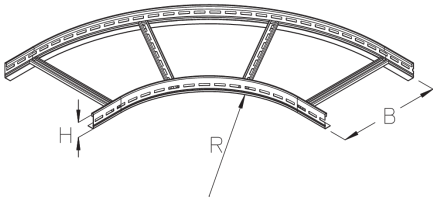


steel, batch/hot-dip galvanized

Products	R			weight
LGIB-BS 60-20F	400 mm	90 °	HORIZONTAL	3,770 kg
LGIB-BS 60-30F	400 mm	90 °	HORIZONTAL	4,820 kg
LGIB-BS 60-40F	400 mm	90 °	HORIZONTAL	6,040 kg

**R:** radius

## DETAIL AND APPLICATION IMAGES

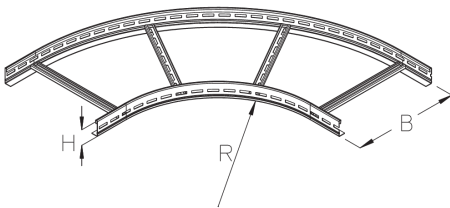

## OPTIONAL ACCESSORIES

LGV-BS 60, LGVH-BS 60, LGVV-BS 60, KLU, LGTRV 60

