


LGTRV 60

Cable ladder separating strip, variable, height = 33 mm

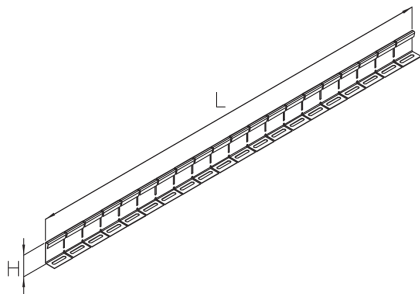

Cables and wires with different functions or voltages can be routed separately from one another by using the variable separating strip LGTRV 60. The separating strip is separated into segments. This makes it flexible and ideal for being installed in formed parts. Mounting bolts are included. The separating strip LGTRV 60 is suitable for LGG 60 cable ladders. It is 33 mm high and 1000 mm long. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continously hot galvanized/Sendzimir process

Products	H	L	t	W
LGTRV 60S	33 mm	1000 mm	0,75 mm	0,438 kg
incl.: 3 × FKS 6X10, 3 × AM16 M6F				

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	L	t	W
LGTRV 60E	33 mm	1000 mm	0,80 mm	0,462 kg
incl.: 3 × FKS 6X10E, 3 × AM16 M6E4				

H: height
L: length
t: material thickness
W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



