


## LGV 50

Cable ladder connector, height = 50 mm

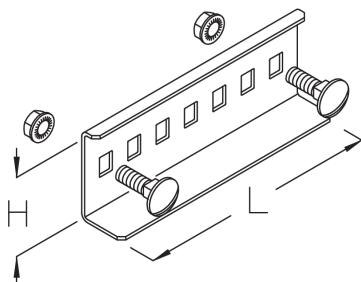

STU 50 vertical ladders can be connected to each other using side connector LGV 50 and clamping bolts. It is pushed onto the rail of the vertical ladder from the outside and bolted in place using the clamp fastener. The connecting rack is then pushed in and also bolted in place. The side connector LGV 50 is 50 mm high and 150 mm long. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continously hot galvanized/Sendzimir process

Products	H	L	W
LGV 50S	50 mm	150 mm	0,212 kg
incl.: 2 × KLS 8X16			

steel, batch/hot-dip galvanized

Products	H	L	W
LGV 50F	50 mm	150 mm	0,218 kg
incl.: 2 × KLS 8X16E			

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	L	W
LGV 50E	50 mm	150 mm	0,208 kg
incl.: 2 × KLS 8X16E			



# PRODUCT INFORMATION

---

**H:** height  
**L:** length  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES

