


## LGV 60

Cable ladder connector, height = 60 mm

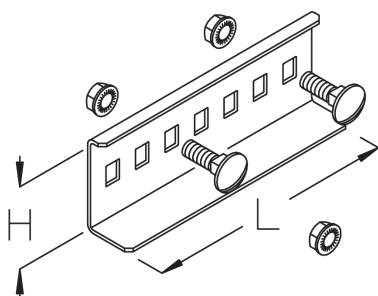

The side connector LGV 60 can be used to connect LGG 60 vertical ladders/cable ladders or cable ladders and formed parts. It is pushed onto the rail of the cable ladder or vertical ladder from the outside and bolted in place with the clamp fastener. The connecting rack is then pushed in and also bolted in place. The side connector LGV 60 is 60 mm high and 150 mm long. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continuously hot galvanized/Sendzimir process

Products	H	L	W
LGV 60S	60 mm	150 mm	0,236 kg
incl.: 2 × KLS 8X16			

steel, batch/hot-dip galvanized

Products	H	L	W
LGV 60F	60 mm	150 mm	0,247 kg
incl.: 2 × KLS 8X16E			

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	L	W
LGV 60E	60 mm	150 mm	0,245 kg
incl.: 2 × KLS 8X16E			



# PRODUCT INFORMATION

---

**H:** height  
**L:** length  
**W:** Weight per storage unit

## DETAIL AND APPLICATION IMAGES

