


PRODUCT INFORMATION

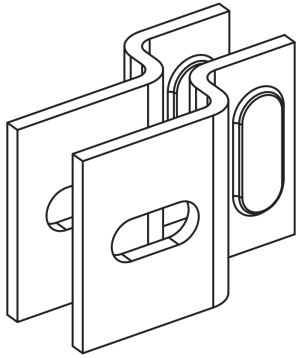

LH

Ladder bracket

The ladder brackets LH can be used to attach LGG 60 and STU 50 vertical ladders to the wall. The distance between the ladder brackets must not exceed 1500 mm. The ladder bracket is made of hot-dip galvanized steel.

steel, batch/hot-dip galvanized

Products	B	L	t	weight
LH F	50 mm	70 mm	4,00 mm	0,252 kg

B: width
L: length
t: material thickness

DETAIL AND APPLICATION IMAGES

