


MA 35

Middle suspending bracket, internal

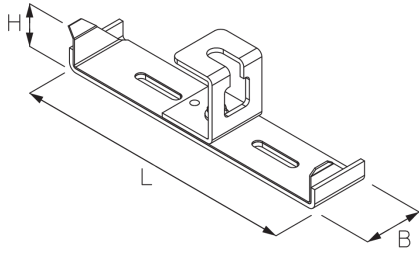

The internal central suspension MA 35 is used for suspending cable trays up to 300 mm wide from ceilings. It is designed for loads up to 0.26 kN and is made of sendzimir hot-dip galvanized steel. MA 35 must be inserted from the sides of the cable tray. It is suspended using a GB threaded rod (not included in the set).

steel, continuously hot galvanized/Sendzimir process

| Products | H | B | L | P _{max} | W |
|-----------|-------|-------|--------|------------------|----------|
| MA 35-10S | 30 mm | 40 mm | 97 mm | 0,26 kN | 0,240 kg |
| MA 35-20S | 30 mm | 40 mm | 197 mm | 0,26 kN | 0,351 kg |
| MA 35-30S | 30 mm | 40 mm | 297 mm | 0,26 kN | 0,476 kg |

H: height

B: width

L: length



P_{max}: maximum load

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

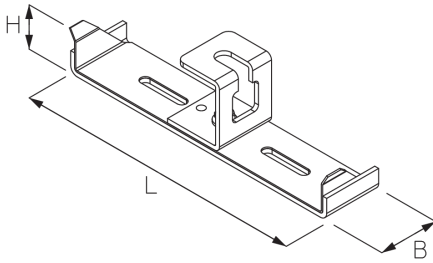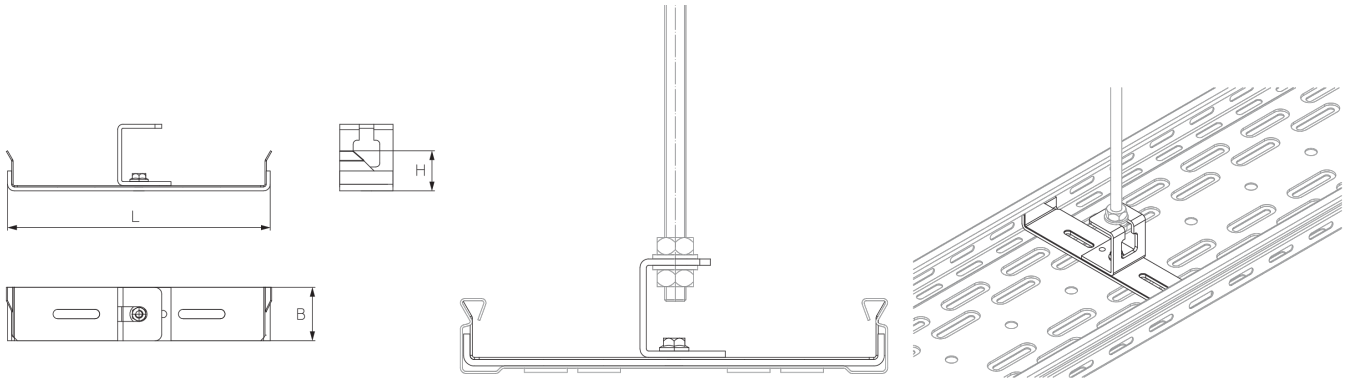

OPTIONAL ACCESSORIES

KLR, SAZ, GB, SEM, SEMS

