


MA 60

Middle suspending bracket, internal

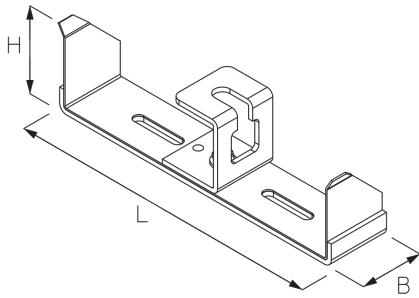

The internal central suspension MA 60 is used for suspending cable trays up to 300 mm wide from ceilings. It is designed for loads up to 0.26 kN and is made of sendzimir hot-dip galvanized steel. MA 60 must be inserted from the sides of the cable tray. It is suspended using a GB threaded rod (not included in the set).

steel, continuously hot galvanized/Sendzimir process

Products	H	B	L	P _{max}	W
MA 60-10S	55 mm	40 mm	97 mm	0,26 kN	0,256 kg
MA 60-20S	55 mm	40 mm	197 mm	0,26 kN	0,366 kg
MA 60-30S	55 mm	40 mm	297 mm	0,26 kN	0,492 kg

H: height

B: width

L: length


P_{max}: maximum load

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

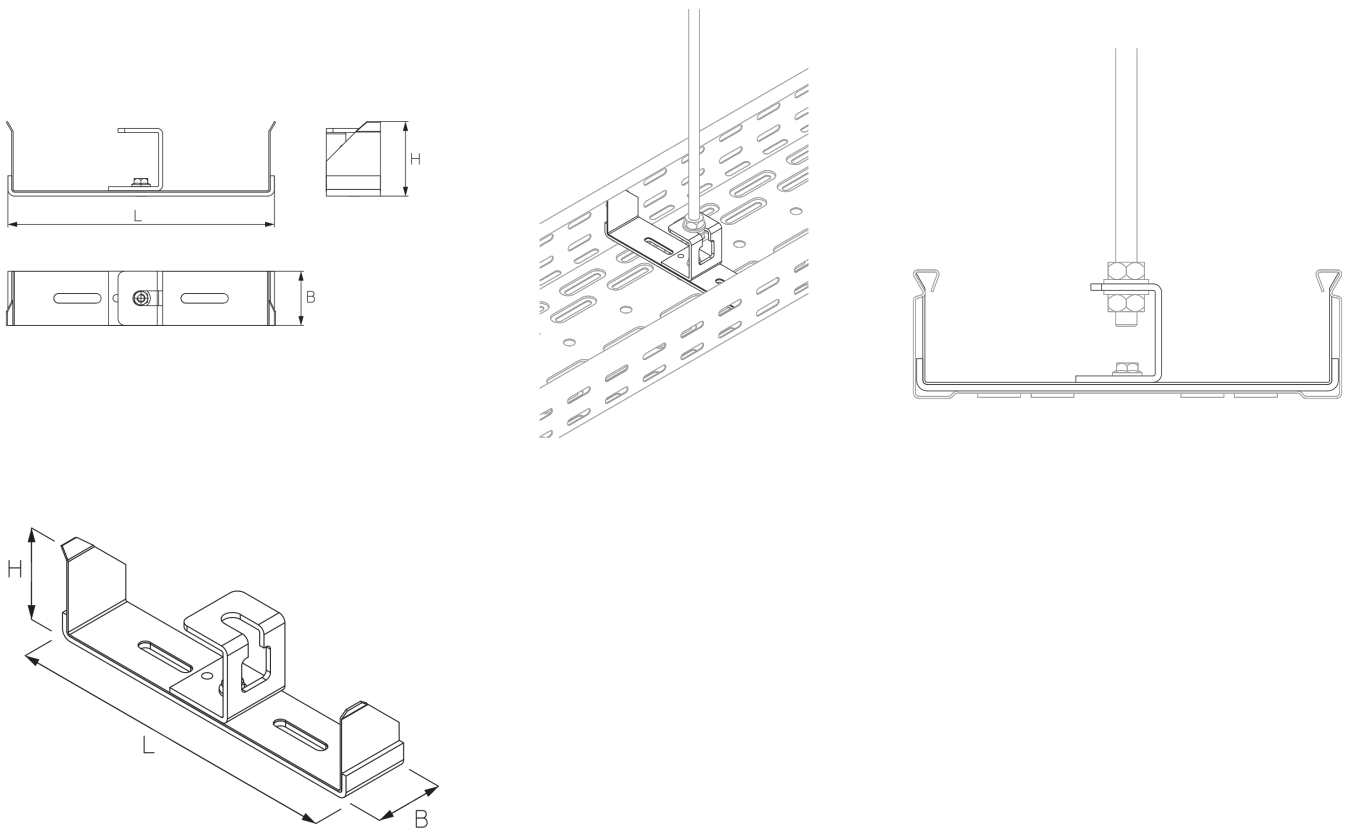

OPTIONAL ACCESSORIES

KLR, SAZ, GB, SEM, SEMS

