


RB45 110

Cable tray bend, height = 110 mm

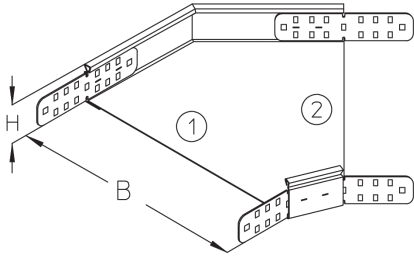

The cable tray bend RB45 110 allows the direction of cable routing to be changed horizontally by 45°. They are suitable for cable trays with sides 110 mm high and have integrated side connectors. The bend is inserted into the cable tray and bolted in place using a VB floor connector. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continuously hot galvanized/Sendzimir process

Products	H	B			W
RB45 110-10S	110 mm	100 mm	45 °	HORIZONTAL	1,348 kg
incl.:					
4 × KLR					
RB45 110-20S	110 mm	200 mm	45 °	HORIZONTAL	1,652 kg
incl.:					
4 × KLR					
RB45 110-30S	110 mm	300 mm	45 °	HORIZONTAL	2,248 kg
incl.:					
4 × KLR					
RB45 110-40S	110 mm	400 mm	45 °	HORIZONTAL	2,715 kg
incl.:					
4 × KLR					
RB45 110-50S	110 mm	500 mm	45 °	HORIZONTAL	3,266 kg
incl.:					
4 × KLR					
RB45 110-60S	110 mm	600 mm	45 °	HORIZONTAL	3,881 kg
incl.:					
4 × KLR					



PRODUCT INFORMATION

steel, batch/hot-dip galvanized

Products	H	B			W
RB45 110-10F	110 mm	100 mm	45 °	HORIZONTAL	1,446 kg
incl.:					
4 × KLR E					
RB45 110-20F	110 mm	200 mm	45 °	HORIZONTAL	1,772 kg
incl.:					
4 × KLR E					
RB45 110-30F	110 mm	300 mm	45 °	HORIZONTAL	2,409 kg
incl.:					
4 × KLR E					
RB45 110-40F	110 mm	400 mm	45 °	HORIZONTAL	2,909 kg
incl.:					
4 × KLR E					
RB45 110-50F	110 mm	500 mm	45 °	HORIZONTAL	3,499 kg
incl.:					
4 × KLR E					
RB45 110-60F	110 mm	600 mm	45 °	HORIZONTAL	4,157 kg
incl.:					
4 × KLR E					

H: height

B: width

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES


Page 2



PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com



PRODUCT INFORMATION

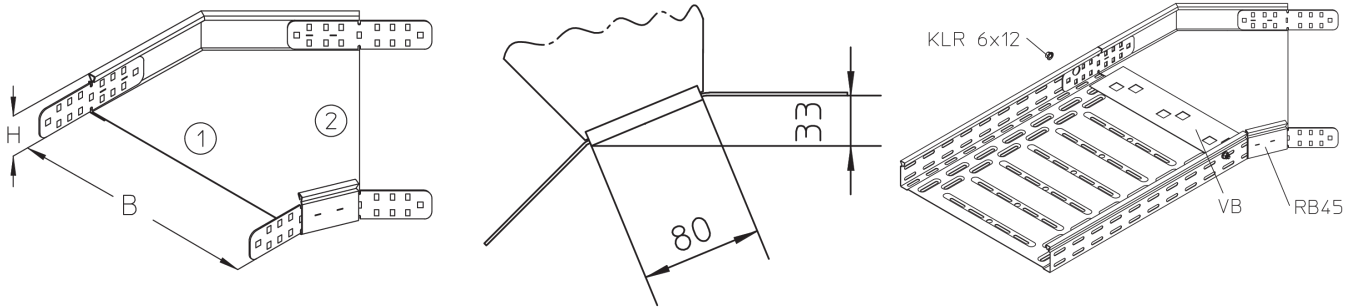

OPTIONAL ACCESSORIES

RBD45, RBDR45, VB, RTRV 110

