

RBV 35

Cable tray bend, variable, height = 35 mm

The variable cable tray bend RBV 35 allows the direction of cable routing to be changed horizontally by 0 to 90° and - mounted as a surface-mounted branch - a change in direction from 0° to 45°. They are suitable for cable trays R(G)(S) with sides 35 mm high and have integrated connectors and slots for fastening separating strips or brackets. The edges at the head of the variable cable tray bend are folded over to protect the cable. The variable cable tray bend is packed flat when delivered. To assemble the bend, fold up the inside and outside sections. Take care to align the head correctly. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continuously hot galvanized/Senzimir process

Products	H	B	W
RBV 35-05S	35 mm	50 mm	0,150 kg
incl.:			
2 × KLR			
RBV 35-10S	35 mm	100 mm	0,234 kg
incl.:			
2 × KLR			
RBV 35-20S	35 mm	200 mm	0,477 kg
incl.:			
2 × KLR			
RBV 35-30S	35 mm	300 mm	1,075 kg
incl.:			
3 × KLR			

H: height


B: width

W: Weight per storage unit

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

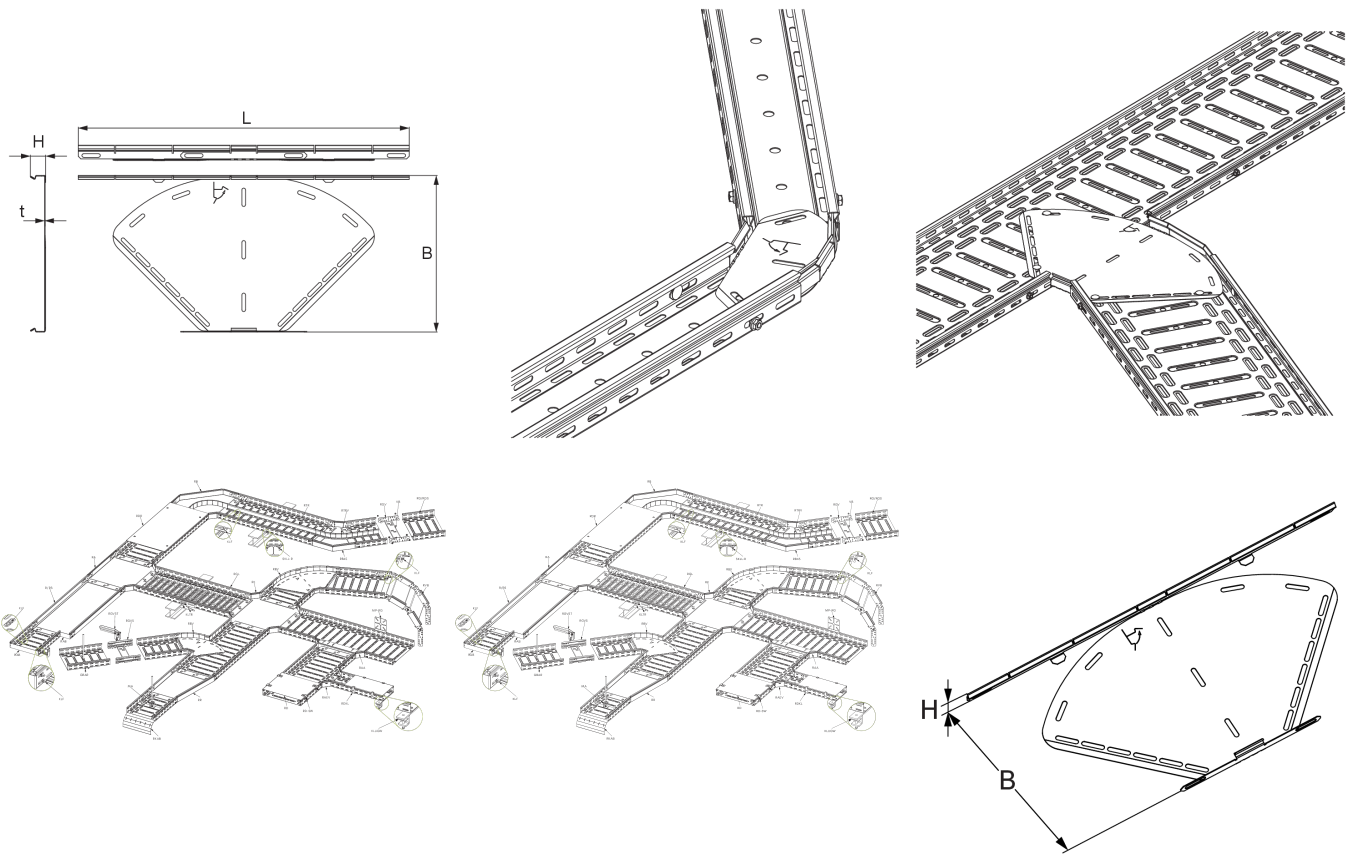

OPTIONAL ACCESSORIES

RBVD, RBVDR, RTRV 35

