

RBV 60

Cable tray bend, variable, height = 60 mm

The variable cable tray bend RBV 60 allows the direction of cable routing to be changed horizontally by 0 to 90° and - mounted as a surface-mounted branch - a change in direction from 0° to 45°. They are suitable for cable trays R(G)(S) and RI(S) with sides 60 mm high and have integrated connectors and slots for fastening separating strips or brackets. The edges at the head of the variable cable tray bend are folded over to protect the cable. The variable cable tray bend is packed flat when delivered. To assemble the bend, fold up the inside and outside sections. Take care to align the head correctly. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continuously hot galvanized/Senzimir process

Products	H	B	weight
RBV 60-05S	60 mm	50 mm	0,242 kg
incl.:			
4 × KLR			
RBV 60-10S	60 mm	100 mm	0,335 kg
incl.:			
4 × KLR			
RBV 60-20S	60 mm	200 mm	0,605 kg
incl.:			
4 × KLR			
RBV 60-30S	60 mm	300 mm	1,263 kg
incl.:			
5 × KLR			
RBV 60-40S	60 mm	400 mm	1,862 kg
incl.:			
5 × KLR			
RBV 60-50S	60 mm	500 mm	3,196 kg
incl.:			
6 × KLR			
RBV 60-60S	60 mm	600 mm	4,285 kg



PRODUCT INFORMATION

Products	H	B	weight
incl.: 6 × KLR			

Stainless steel, according to ASTM 304 / BS 304 S 3

Products	H	B	weight
RBV 60-05E	60 mm	50 mm	0,264 kg
incl.: 4 × KLR E			
RBV 60-10E	60 mm	100 mm	0,364 kg
incl.: 4 × KLR E			
RBV 60-20E	60 mm	200 mm	0,653 kg
incl.: 4 × KLR E			
RBV 60-30E	60 mm	300 mm	1,281 kg
incl.: 5 × KLR E			
RBV 60-40E	60 mm	400 mm	1,883 kg
incl.: 5 × KLR E			
RBV 60-50E	60 mm	500 mm	3,227 kg
incl.: 6 × KLR E			
RBV 60-60E	60 mm	600 mm	4,323 kg
incl.: 6 × KLR E			

Stainless steel, according to ASTM 316 Ti / AISI 316 L, BS 320S17 / BS 316S11

Products	H	B	weight
RBV 60-05E4	60 mm	50 mm	0,274 kg

Page 2



PohlCon GmbH
Nobelstraße 51 | 12057 Berlin
Telefon: +49 30 68283-04 | Fax: +49 30 68283-383 | contact@pohlcon.com



PRODUCT INFORMATION

Products	H	B	weight
incl.: 4 × KLR E4			
RBV 60-10E4	60 mm	100 mm	0,376 kg
incl.: 4 × KLR E4			
RBV 60-20E4	60 mm	200 mm	0,669 kg
incl.: 4 × KLR E4			
RBV 60-30E4	60 mm	300 mm	1,306 kg
incl.: 5 × KLR E4			
RBV 60-40E4	60 mm	400 mm	1,916 kg
incl.: 5 × KLR E4			
RBV 60-50E4	60 mm	500 mm	3,279 kg
incl.: 6 × KLR E4			
RBV 60-60E4	60 mm	600 mm	4,389 kg
incl.: 6 × KLR E4			


H: height

B: width

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

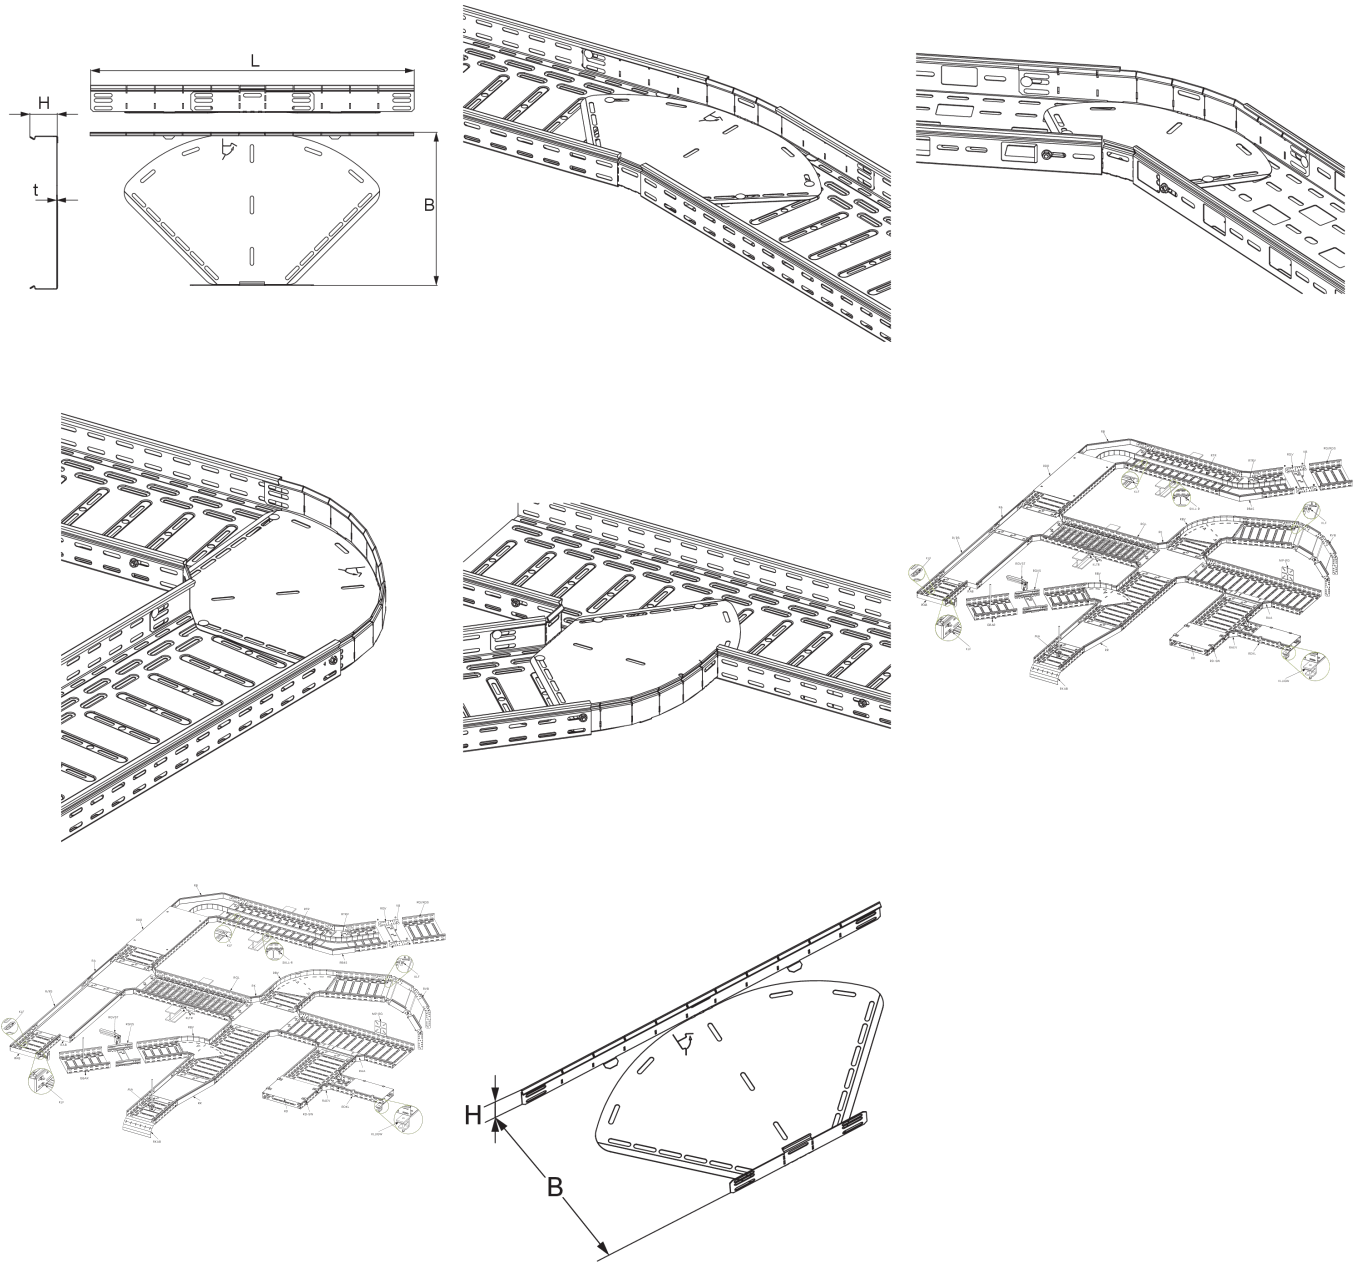

OPTIONAL ACCESSORIES

RBVD, RBVDR, RTRV 60, RI 60, RIS 60

