


## RBV 85

Cable tray bend, variable, height = 85 mm

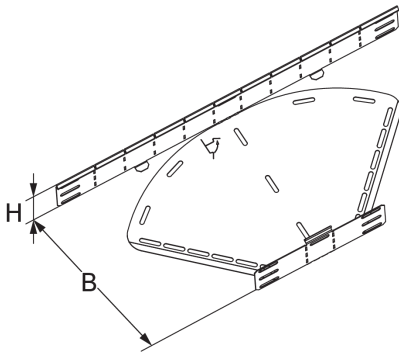

The variable cable tray bend RBV 85 allows the direction of cable routing to be changed horizontally by 0 to 90° and - mounted as a surface-mounted branch - a change in direction from 0° to 45°. They are suitable for cable trays R(G)(S) with sides 85 mm high and have integrated connectors and slots for fastening separating strips or brackets. The edges at the head of the variable cable tray bend are folded over to protect the cable. The variable cable tray bend is packed flat when delivered. To assemble the bend, fold up the inside and outside sections. Take care to align the head correctly. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.

steel, continuously hot galvanized/Sendzimir process

Products	H	B	weight
RBV 85-10S	85 mm	100 mm	0,437 kg
incl.:			
6 × KLR			
RBV 85-20S	85 mm	200 mm	0,732 kg
incl.:			
6 × KLR			
RBV 85-30S	85 mm	300 mm	1,450 kg
incl.:			
7 × KLR			
RBV 85-40S	85 mm	400 mm	2,080 kg
incl.:			
7 × KLR			
RBV 85-50S	85 mm	500 mm	3,503 kg
incl.:			
8 × KLR			
RBV 85-60S	85 mm	600 mm	4,663 kg
incl.:			
8 × KLR			

H: height

Page 1




# PRODUCT INFORMATION

---

**B:** width

## DETAIL AND APPLICATION IMAGES

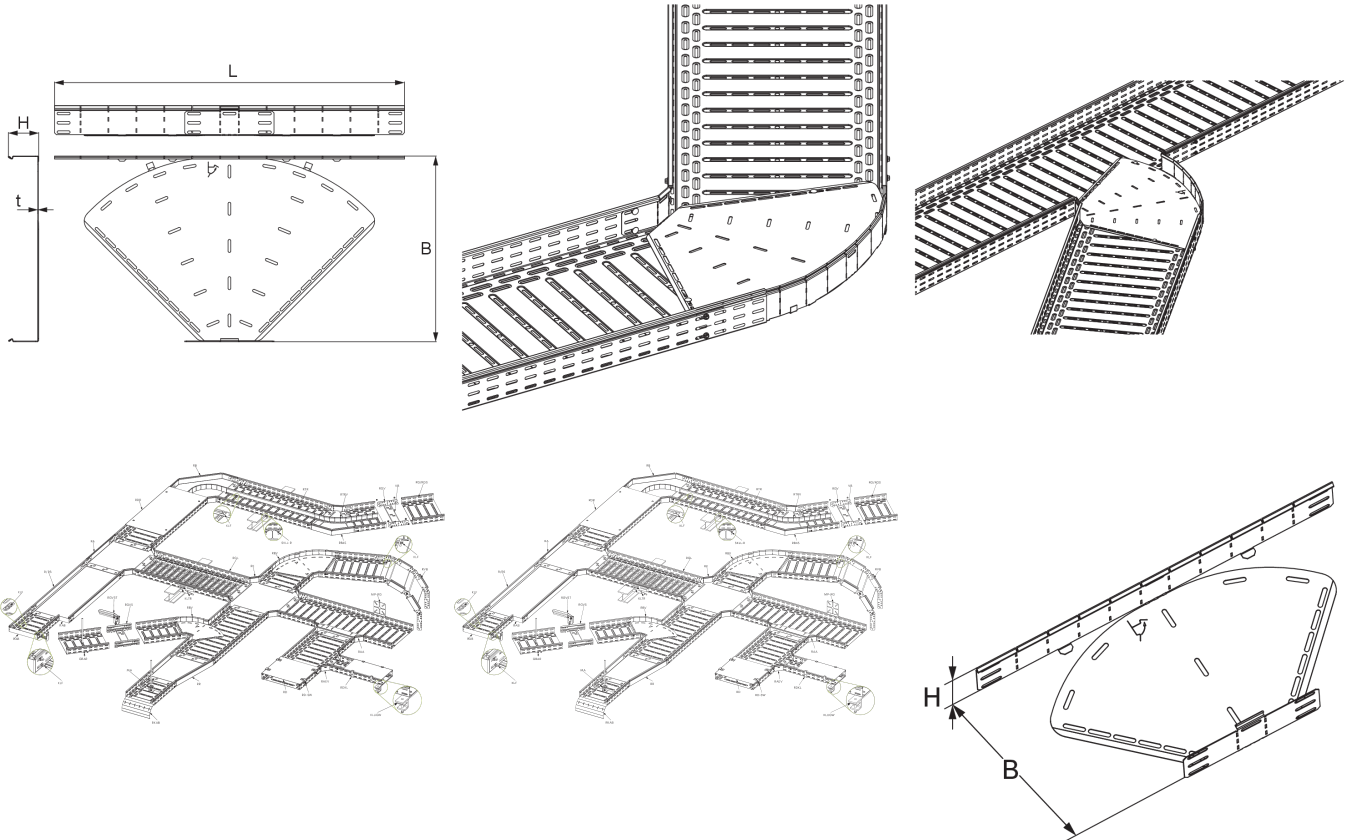

## OPTIONAL ACCESSORIES

RBVD, RBVDR, RTRV 85

