


RG 60

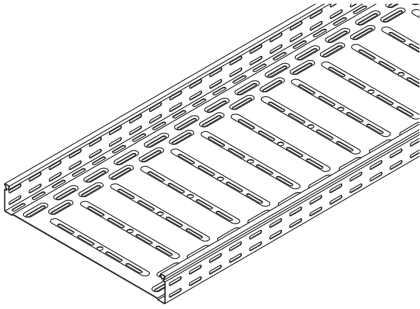

steel, continuously hot galvanized/Sendzimir process

Products	H	B	L	t	A	Q _{SK}	weight
RG 60-10S	60 mm	100 mm	3000 mm	0,75 mm	57 cm ²	0,09 kN/m	4,300 kg
RG 60-20S	60 mm	200 mm	3000 mm	0,75 mm	117 cm ²	0,18 kN/m	5,800 kg
RG 60-30S	60 mm	300 mm	3000 mm	0,75 mm	177 cm ²	0,27 kN/m	7,400 kg
RG 60-40S	60 mm	400 mm	3000 mm	0,88 mm	237 cm ²	0,36 kN/m	10,600 kg

H: height

B: width

L: length

t: material thickness

A: cross section area

Q_{SK}: distributed load control cable

DETAIL AND APPLICATION IMAGES



PRODUCT INFORMATION

