

RG 85

Cable tray, perforated, height = 85 mm

The RG 85 perforated cable trays have sides 85 mm high and are available in widths from 100 to 600 mm. The standard length is 3000 mm. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.



steel, continuously hot galvanized/Sendzimir process

Products	H	B	L	t	Q_{SK}	A	W
RG 85-10S	85 mm	100 mm	3000 mm	0,75 mm	0,12 kN/m	82 cm ²	5,010 kg
RG 85-20S	85 mm	200 mm	3000 mm	0,75 mm	0,25 kN/m	167 cm ²	6,500 kg
RG 85-30S	85 mm	300 mm	3000 mm	0,88 mm	0,38 kN/m	252 cm ²	9,600 kg
RG 85-40S	85 mm	400 mm	3000 mm	0,88 mm	0,51 kN/m	337 cm ²	11,600 kg
RG 85-50S	85 mm	500 mm	3000 mm	1,00 mm	0,63 kN/m	422 cm ²	15,250 kg
RG 85-60S	85 mm	600 mm	3000 mm	1,00 mm	0,76 kN/m	507 cm ²	17,600 kg

steel, batch/hot-dip galvanized

Products	H	B	L	t	Q_{SK}	A	W
RG 85-10F	85 mm	100 mm	3000 mm	0,75 mm	0,12 kN/m	82 cm ²	6,000 kg
RG 85-20F	85 mm	200 mm	3000 mm	0,75 mm	0,25 kN/m	167 cm ²	7,150 kg
RG 85-30F	85 mm	300 mm	3000 mm	0,88 mm	0,38 kN/m	252 cm ²	10,550 kg
RG 85-40F	85 mm	400 mm	3000 mm	0,88 mm	0,51 kN/m	337 cm ²	12,900 kg
RG 85-50F	85 mm	500 mm	3000 mm	1,00 mm	0,63 kN/m	422 cm ²	16,600 kg
RG 85-60F	85 mm	600 mm	3000 mm	1,00 mm	0,76 kN/m	507 cm ²	18,400 kg


H: height
B: width
L: length



PRODUCT INFORMATION

t: material thickness
Q_{SK}: distributed load control cable
A: cross section area
W: Weight per storage unit


DETAIL AND APPLICATION IMAGES

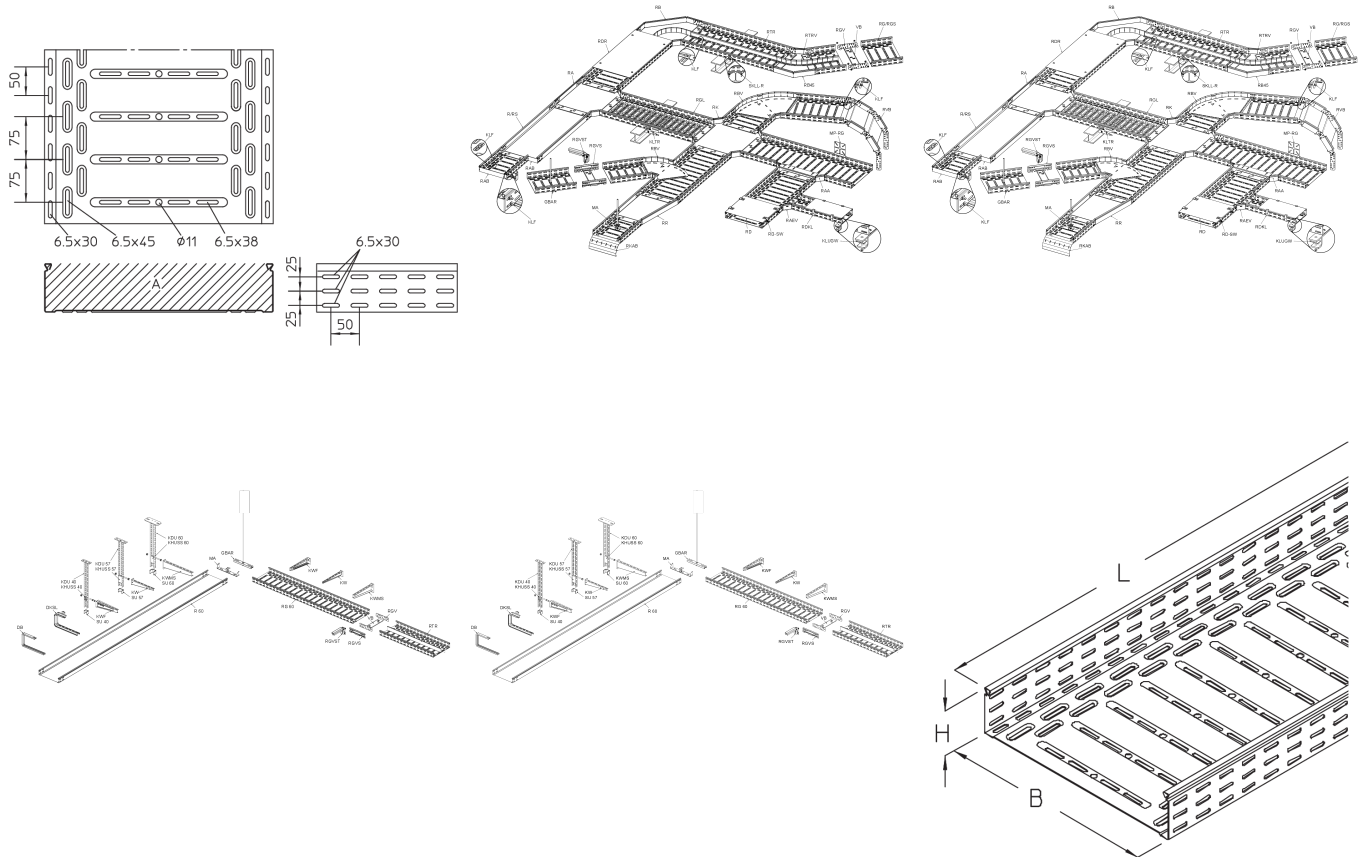

LOAD DIAGRAM



PRODUCT INFORMATION

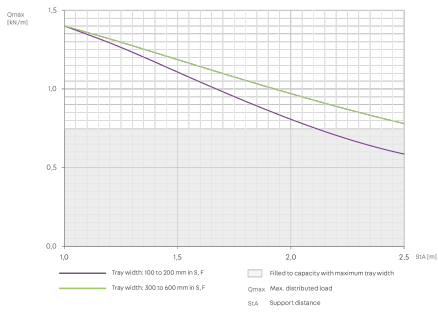

OPTIONAL ACCESSORIES

RD, RDR, RB 85, RB45 85, RBV 85, RAE 85, RAA 85, RA 85, RK 85, RVB 85, RR 85, RAB 85, REB, RGV 85, VB, RTR 85, RKAB

