

RGS 85

Cable tray, perforated, heavy, height = 85 mm

The RGS 85 perforated cable trays have sides 85 mm high and are available in widths from 100 to 600 mm. The standard length is 3000 mm. We provide components in various materials and surface finishes to ensure that the corrosion requirements are met for all sorts of applications.



steel, continuously hot galvanized/Senzimir process

Products	H	B	L	t	A	Q _{SK}	weight
RGS 85-10S	85 mm	100 mm	3000 mm	1,50 mm	82 cm ²	0,12 kN/m	9,837 kg
RGS 85-20S	85 mm	200 mm	3000 mm	1,50 mm	167 cm ²	0,25 kN/m	12,835 kg
RGS 85-30S	85 mm	300 mm	3000 mm	1,50 mm	252 cm ²	0,38 kN/m	16,144 kg
RGS 85-40S	85 mm	400 mm	3000 mm	1,50 mm	337 cm ²	0,51 kN/m	19,452 kg
RGS 85-50S	85 mm	500 mm	3000 mm	1,50 mm	422 cm ²	0,63 kN/m	22,760 kg
RGS 85-60S	85 mm	600 mm	3000 mm	1,50 mm	507 cm ²	0,76 kN/m	26,069 kg

H: height

B: width

L: length



t: material thickness

A: cross section area

Q_{SK}: distributed load control cable

DETAIL AND APPLICATION IMAGES



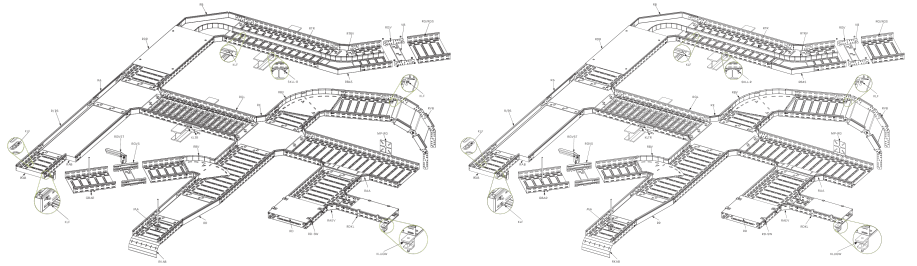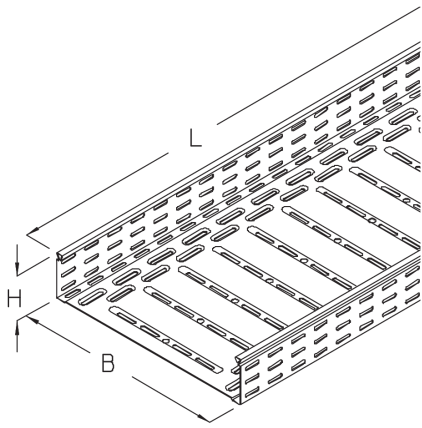

OPTIONAL ACCESSORIES

RD, RDR, RDS, RDSR, RB 85, RB45 85, RBV 85, RAE 85, RAA 85, RA 85, RK 85, RVB 85, RR 85, RAB 85, REB, RGV 85, VB, RTR 85, RKAB

